Rich's lesson module checklist

- ❑ Slides and lab posted
- ❑ WB converted from PowerPoint
- ❑ Print out agenda slide and annotate page numbers

- ❑ Flash cards
- ❑ Page numbers
- ❑ 1st minute quiz
- ❑ Web Calendar summary
- ❑ Web book pages
- ❑ Commands

- ❑ Lab tested and uploaded
- ❑ Test tech email
- ❑ Schedule tech file email for Lab 9 ready (at end of class)
- ❑ Schedule lock/unlock turnin directory (scripts/schedule-submit-locks)
- ❑ Apache configured for student websites
- ❑ Archived Test(s) #2 available on Canvas

- ❑ Backup slides, CCC info, handouts on flash drive
- ❑ Spare 9v battery for mic
- ❑ Key card for classroom door

- ❑ Check CCC Confer and 3C Media videos

Last updated 4/11/2017

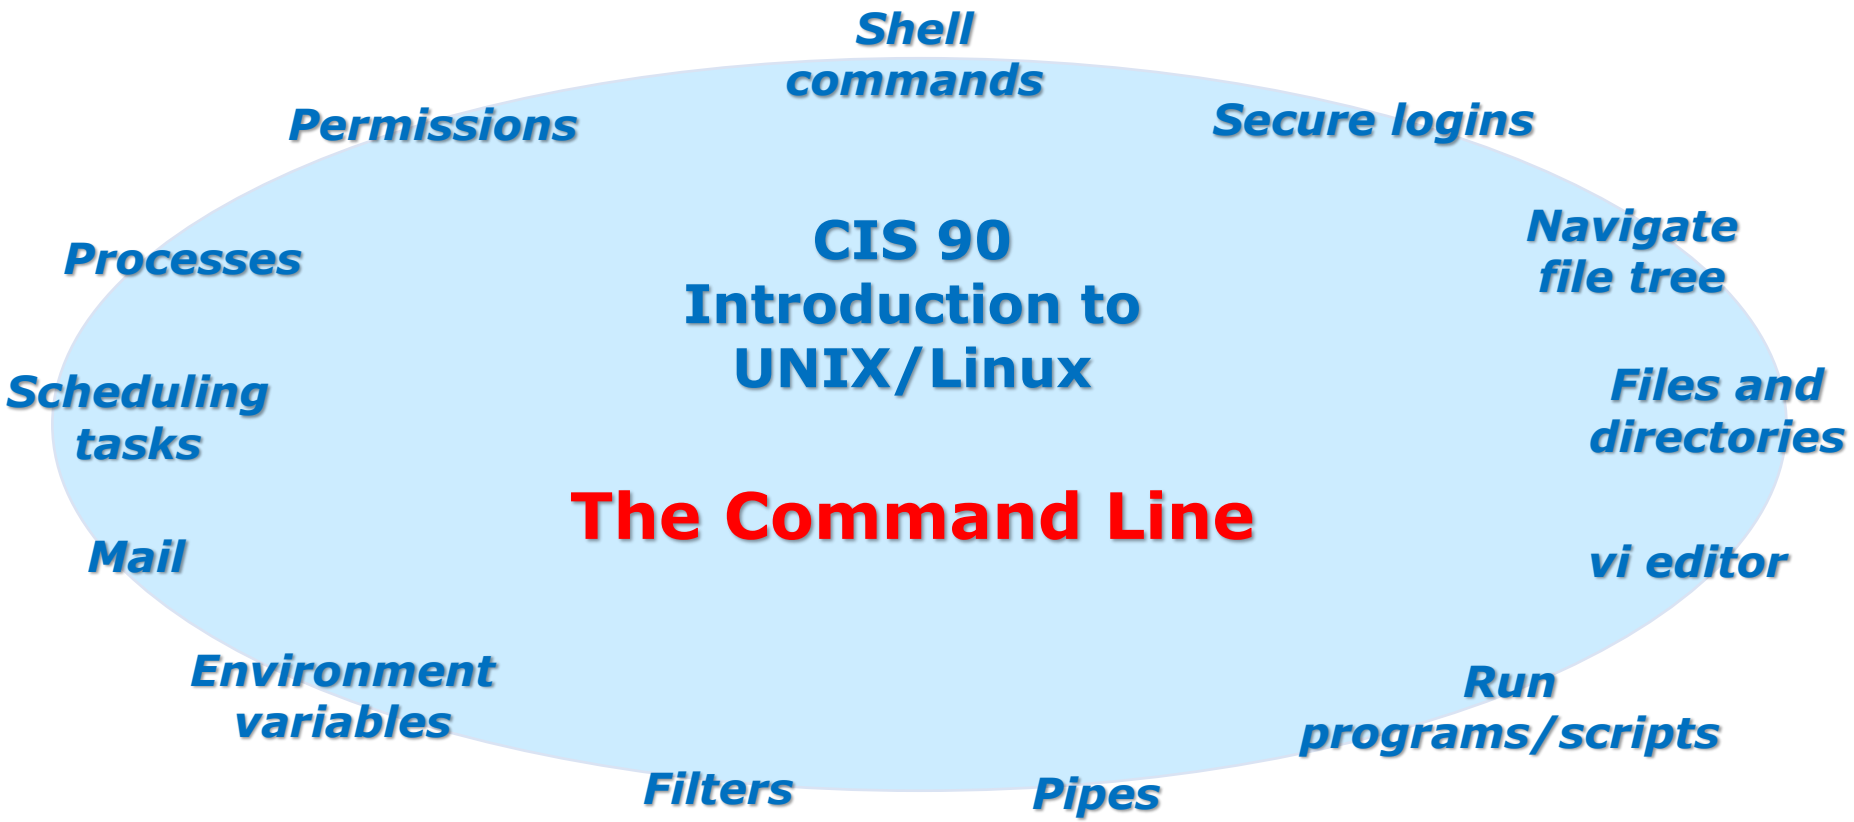

Student Learner Outcomes

1. Navigate and manage the UNIX/Linux file system by viewing, copying, moving, renaming, creating, and removing files and directories.
2. Use the UNIX features of file redirection and pipelines to control the flow of data to and from various commands.
3. With the aid of online manual pages, execute UNIX system commands from either a keyboard or a shell script using correct command syntax.

Introductions and Credits

Jim Griffin
- Created this Linux course
- Created Opus and the CIS VLab
- Jim's site: http://cabrillo.edu/~jgriffin/

Rich Simms
- HP Alumnus
- Started teaching this course in 2008 when Jim went on sabbatical
- Rich's site: http://simms-teach.com

And thanks to:
- John Govsky for many teaching best practices: e.g. the First Minute quizzes, the online forum, and the point grading system (http://teacherjohn.com/)

Student checklist for attending class

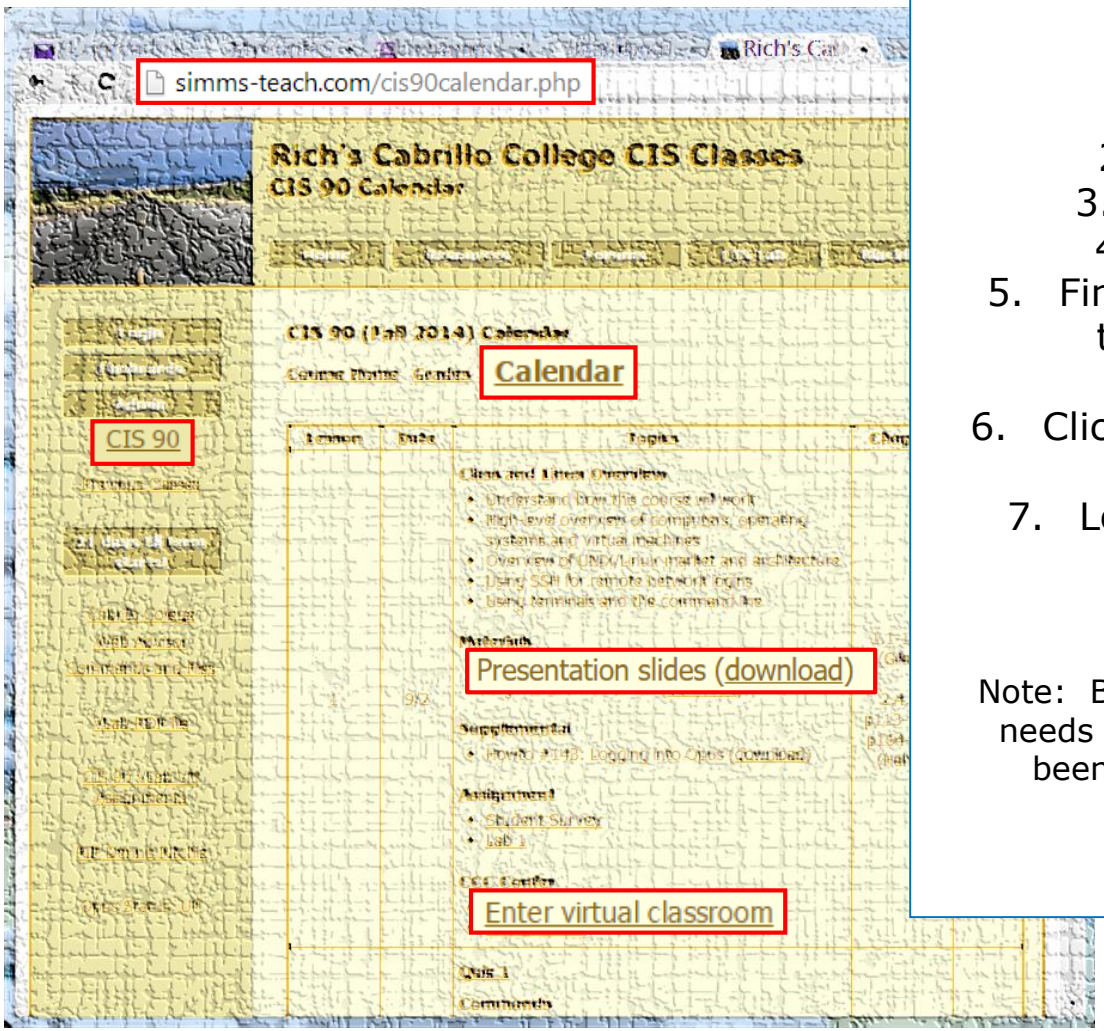

1. Browse to: **http://simms-teach.com**
2. Click the **CIS 90** link.
3. Click the **Calendar** link.
4. Locate today's lesson.
5. Find the **Presentation slides** for the lesson and **download** for easier viewing.
6. Click the **Enter virtual classroom** link to join CCC Confer.
7. Log into Opus with Putty or ssh command.

Note: Blackboard Collaborate Launcher only needs to be installed once. It has already been downloaded and installed on the classroom PC's.

Student checklist for suggested screen layout

- ❑ *Google*
- ❑ *CCC Confer*
- ❑ *Downloaded PDF of Lesson Slides*

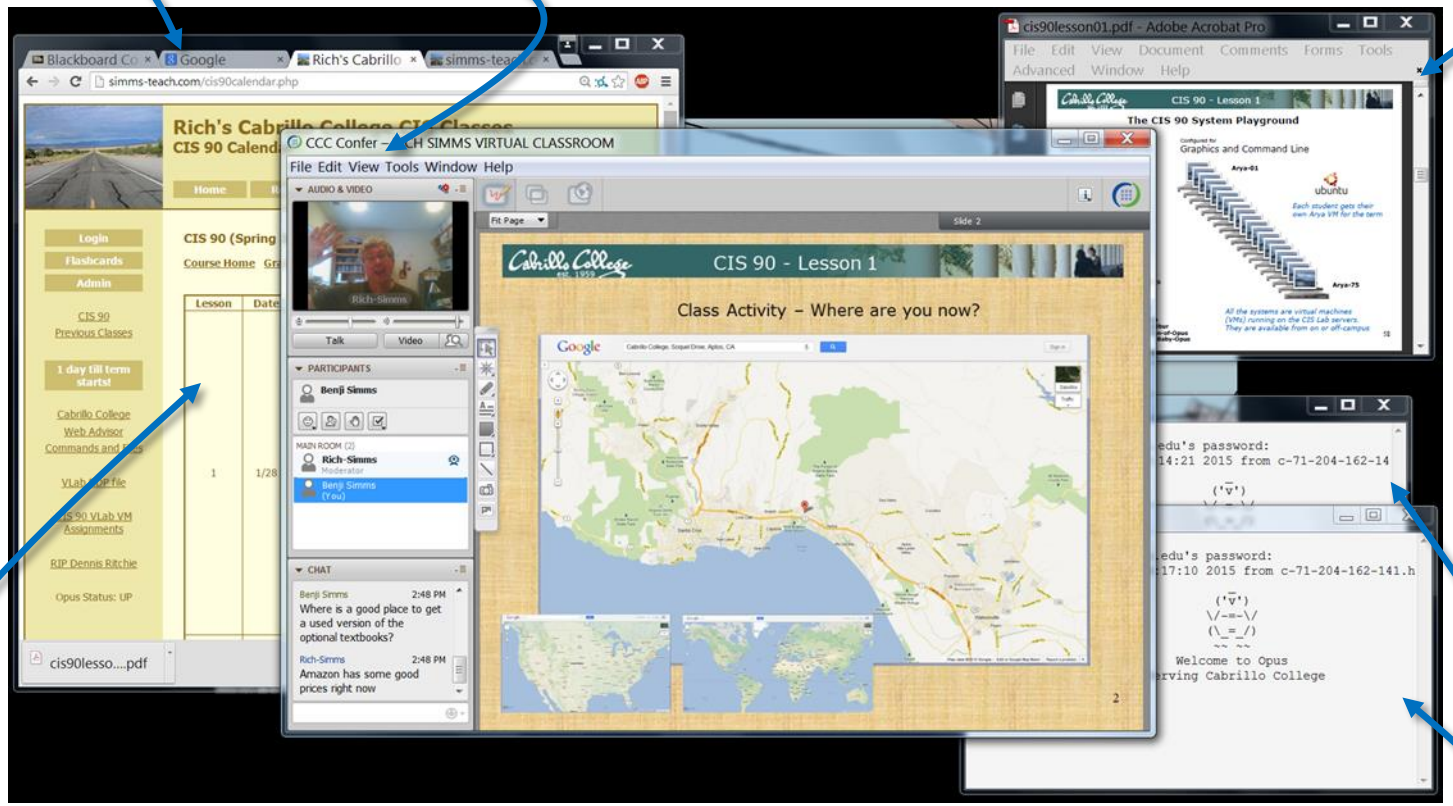

- ❑ *CIS 90 website Calendar page*
- ❑ *One or more login sessions to Opus*

Student checklist for sharing desktop with classmates

1) Instructor gives you sharing privileges

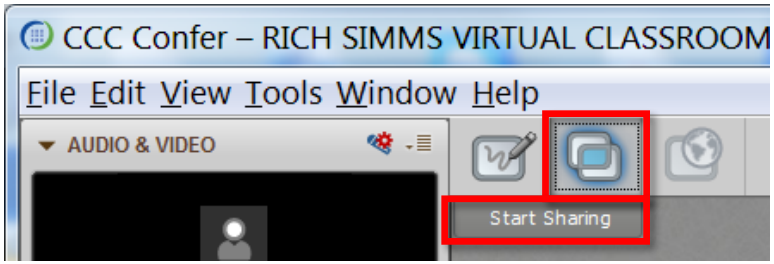

2) Click overlapping rectangles icon. If white "Start Sharing" text is present then click it as well.

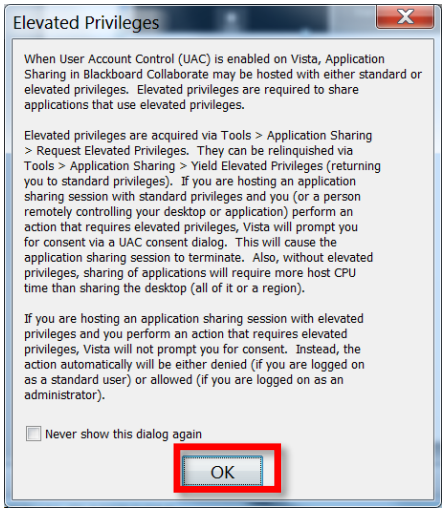

3) Click OK button.

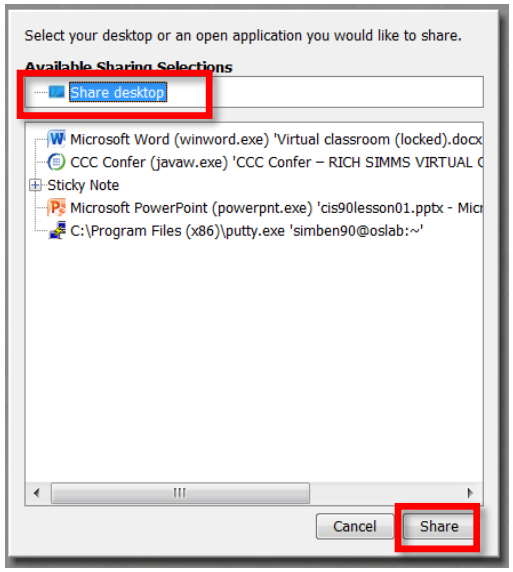

4) Select "Share desktop" and click Share button.

Rich's CCC Confer checklist - setup

[ ] Preload White Board



[ ] Connect session to Teleconference

Session now connected to teleconference

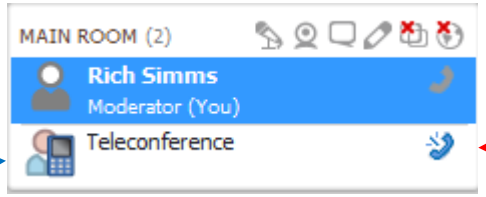

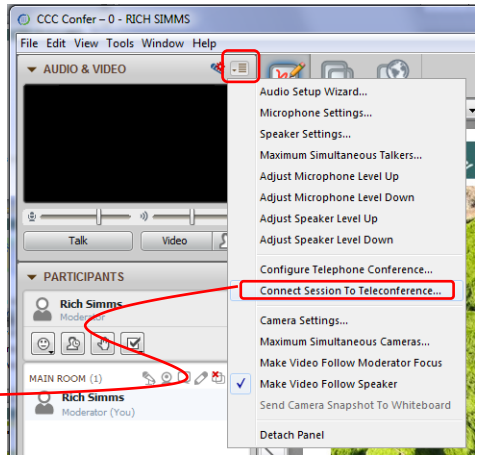

[ ] Is recording on?



Red dot means recording

[ ] Use teleconferencing, not mic

Should be grayed out

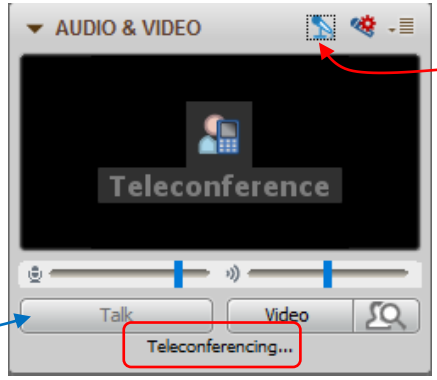

Should change from phone handset icon to little Microphone icon and the Teleconferencing … message displayed

Rich's CCC Confer checklist - screen layout

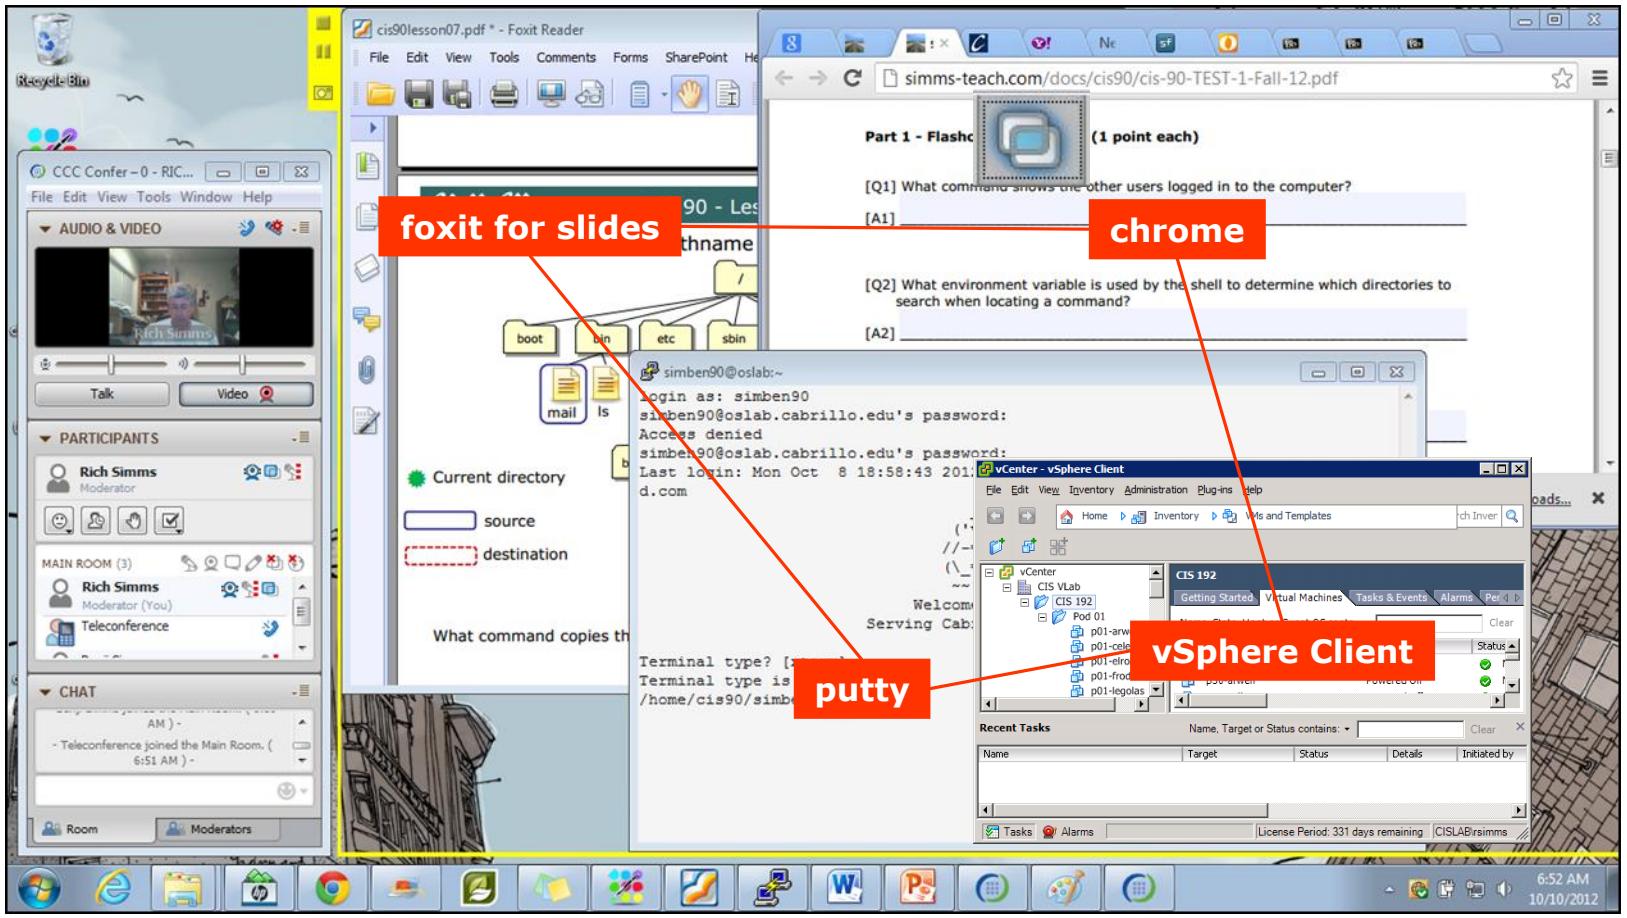

[ ] layout and share apps

Rich's CCC Confer checklist - webcam setup

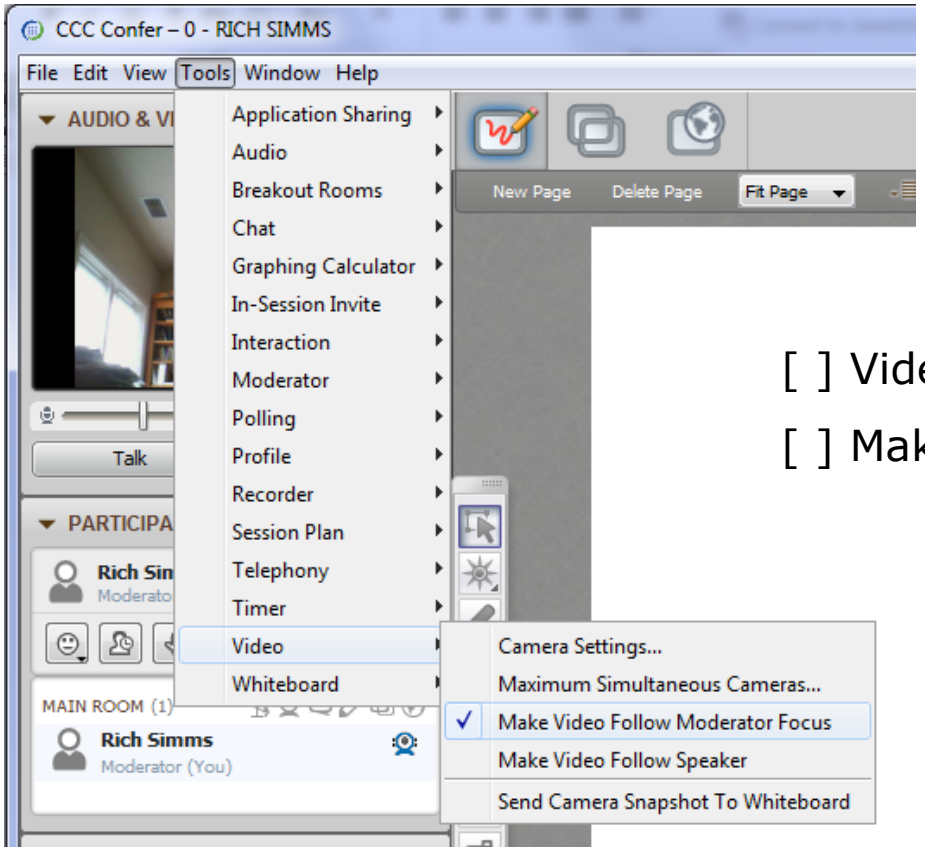

[ ] Video (webcam)

[ ] Make Video Follow Moderator Focus

Rich's CCC Confer checklist - Elmo

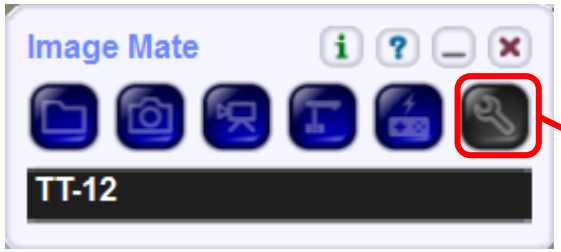

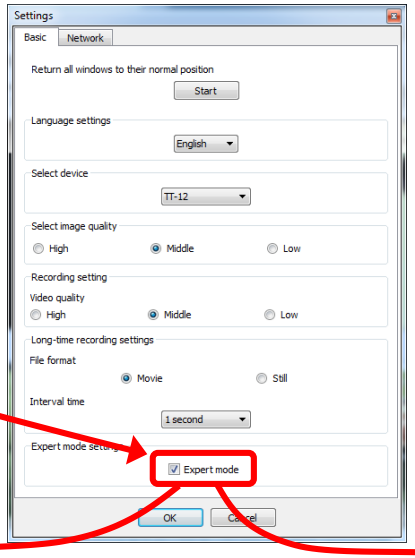

The "rotate image" button is necessary if you use both the side table and the white board.

Quite interesting that they consider you to be an "expert" in order to use this button!

Elmo rotated down to view side table

Elmo rotated up to view white board

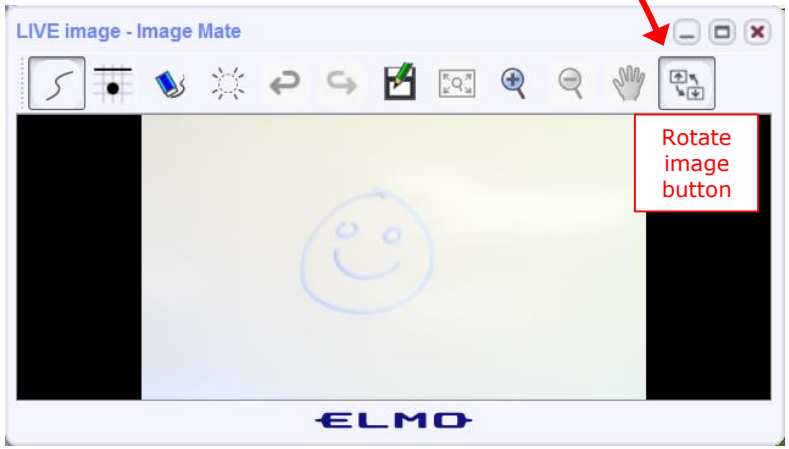

Run and share the Image Mate program just as you would any other app with CCC Confer

Rich's CCC Confer checklist - universal fixes

Universal Fix for CCC Confer:

1) Shrink (500 MB) and delete Java cache
2) Uninstall and reinstall latest Java runtime
3) http://www.cccconfer.org/support/technicalSupport.aspx

Control Panel (small icons)

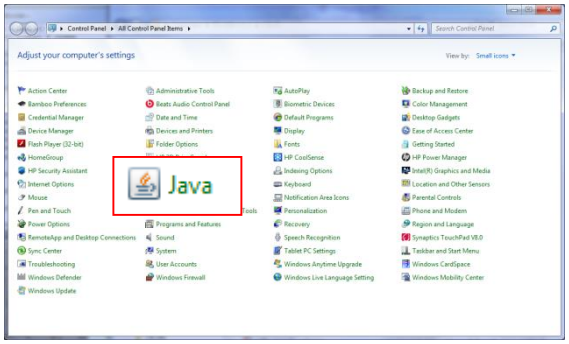

General Tab > Settings…

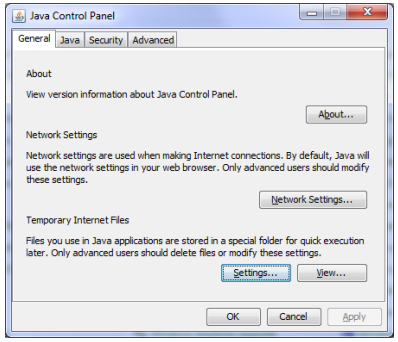

500MB cache size

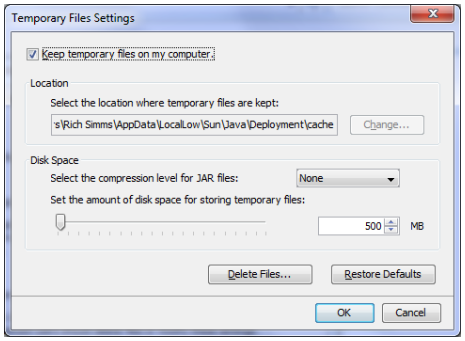

Delete these



Google Java download

Rich's CCC Confer checklist - digital certificate work around

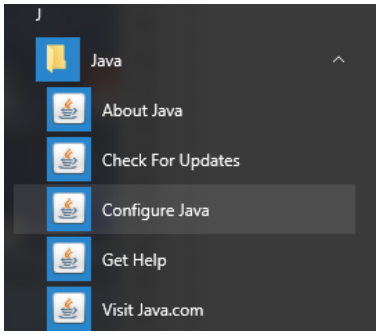

1. Open the Java Control Panel
2. Select the **Security** tab
3. Select **Edit Site List...**
4. Select **Add**
5. Click into the white box next to the red exclamation mark and type **https://na-downloads.elluminate.com**
6. Press OK
7. Press **Continue** on the pop-up message
8. Press OK
9. Access your session or recording once more

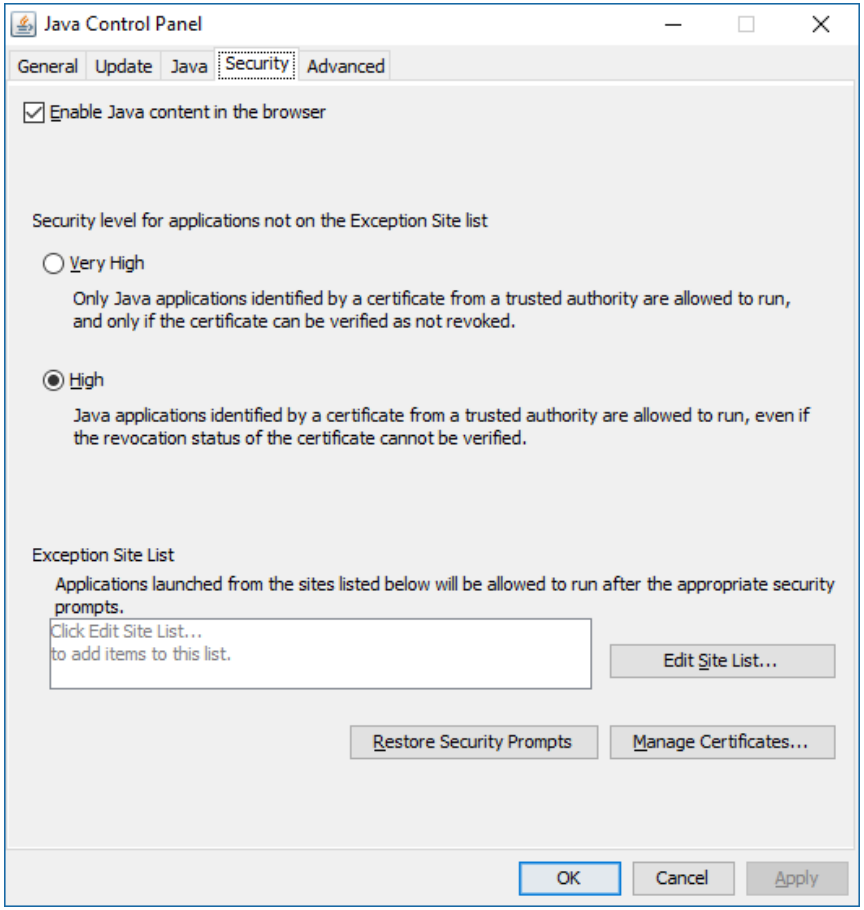

Rich's CCC Confer checklist - Putty Colors

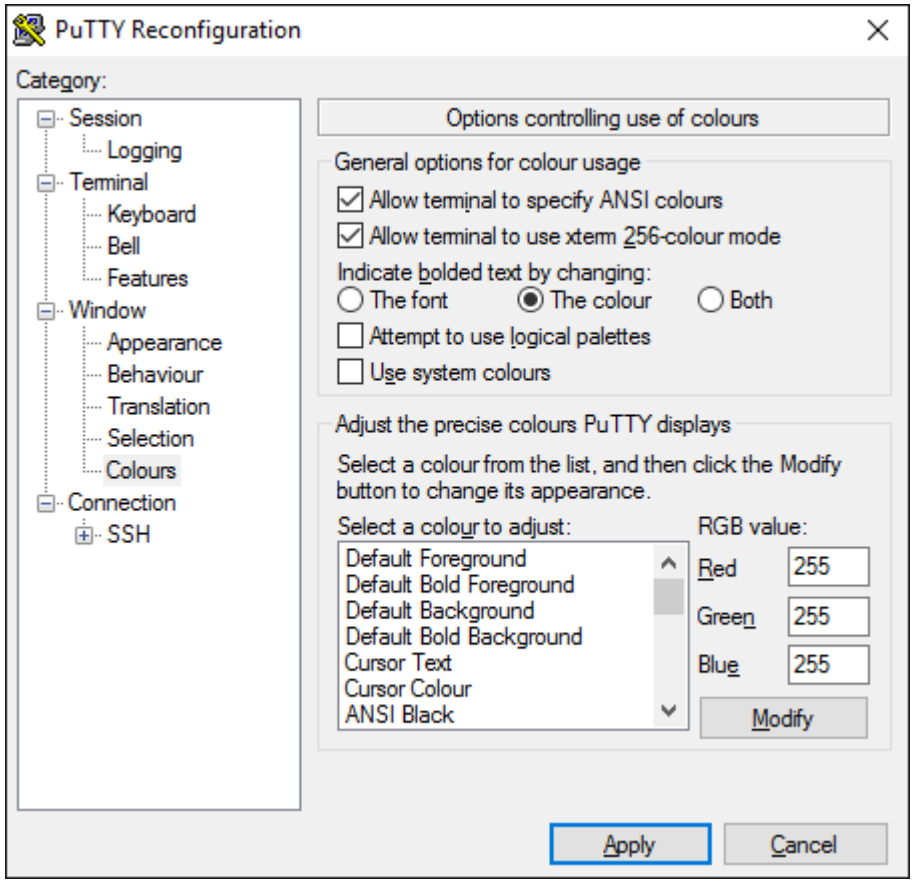

http://looselytyped.blogspot.com/2013/02/zenburn-pleasant-color-scheme-for-putty.html

Putty Colors

Default Foreground 255 255 255
Default Bold Foreground 255 255 255
Default Background 51 51 51
Default Bold Background 255 2 85
Cursor Text 0 0 0
Cursor Color 0 255 0
ANSI Black 77 77 77
ANSI Black Bold 85 85 85
ANSI Red 187 0 0
ANSI Red Bold 255 85 85
ANSI Green 152 251 152
ANSI Green Bold 85 255 85
ANSI Yellow 240 230 140
ANSI Yellow Bold 255 255 85
ANSI Blue 205 133 63
ANSI Blue Bold 135 206 235
ANSI Magenta 255 222 173
ANSI Magenta Bold 255 85 255
ANSI Cyan 255 160 160
ANSI Cyan Bold 255 215 0
ANSI White 245 222 179
ANSI White Bold 255 255 255

Start

Sound Check

*Students that dial-in should mute their line using *6 to prevent unintended noises distracting the web conference.*

*Instructor can use *96 to mute all student lines.*

Volume
**4 - increase conference volume.*
**7 - decrease conference volume.*
**5 - increase your voice volume.*
**8 - decrease your voice volume.*

Instructor: **Rich Simms**
Dial-in: **888-886-3951**
Passcode: **136690**


Melissa


Tess


Alex


Daniel


Ian J.


Harold


Steven P.


Jasen


Sam


Ryan


Roberto


Hans


Cristian


Nicholas


Nigel


Luis


Josh M.


Alison


Gracie


Cameron


Julian


Ken


Joshua V.


Samantha


Philip


Ian C.


Stephen L.


Dillon


Justin

Email me (risimms@cabrillo.edu) a relatively current photo of your face for 3 points extra credit

First Minute Quiz

Please answer these questions **in the order** shown:

Use CCC Confer White Board

email answers to: risimms@cabrillo.edu

(answers must be emailed within the first few minutes of class for credit)

vi editor

Objectives	Agenda
• Create and modify text files	• Quiz • Questions • Test 2 Post Mortem • Housekeeping • grep workout • Shell Six Steps (review) • Signals (review) • Target Practice • Using & • Job control (review) • Load balancing & scheduling (review) • Text editors • vi 101 • vi • Tangent on spell • Assignment • Wrap up

Questions

Questions?

Lesson material?

Labs? Tests?

How this course works?

- Graded work in home directories
- Answers in /home/cis90/answers

Who questions much, shall learn much, and retain much.
- Francis Bacon

If you don't ask, you don't get.
- Mahatma Gandhi

Chinese Proverb	他問一個問題，五分鐘是個傻子，他不問一個問題仍然是一個傻瓜永遠。 *He who asks a question is a fool for five minutes; he who does not ask a question remains a fool forever.*

Test 2 Post Mortem

Test 2 – Results

Missed Q4 = 19
Missed Q30 = 17
Missed Q24 = 17
Missed Q29 = 16
Missed Q27 = 16
Missed Q26 = 16
Missed Q25 = 16
Missed Q21 = 15
Missed Q28 = 14
Missed Q22 = 14
Missed Q2 = 13
Missed Q23 = 12
Missed Q20 = 11
Missed Q17 = 11
Missed Q18 = 10

Missed Q11 = 10
Missed Q19 = 9
Missed Q13 = 8
Missed Q3 = 6
Missed Q14 = 6
Missed Q9 = 4
Missed Q10 = 4
Missed Q5 = 3
Missed Q15 = 3
Missed Q12 = 3
Missed Q8 = 2
Missed Q7 = 2
Missed Q6 = 2
Missed Q16 = 1
Missed Q1 = 1

Extra Credit
Missed Q33 = 21
Missed Q31 = 18
Missed Q32 = 16

For correct answers see test02.graded files in your home directory

White Horse

Q16) There is a file in the */etc* directory named *passwd*. This file has information on all user accounts including usernames, UIDs, first and last name, etc. What is the absolute pathname of this file?

Correct answer: /etc/passwd

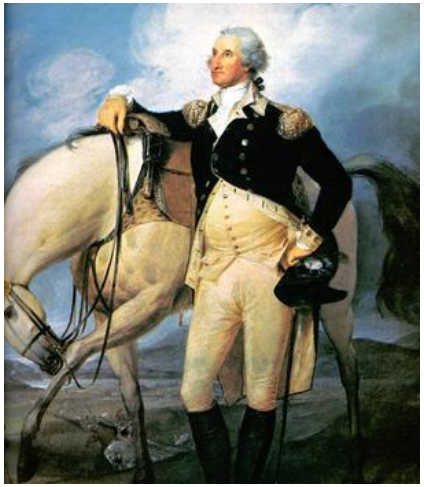

http://www.sodahead.com/united-states/what-color-was-george-washingtons-white-horse/question-636725/

http://kids.britannica.com/comptons/art-55428/General-George-Washington-and-his-staff-welcoming-a-provision-train

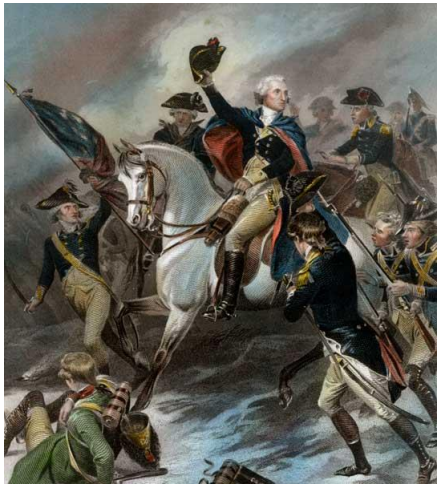

http://www.mountvernon.org/content/revolutionary-war-princeton-white-horse

Housekeeping

1. Lab 8 due tonight

Don't wait till midnight tonight to see if this worked! Submit with an earlier time.

```
at 11:59pm
at> cat files.out bigshell > lab08
at> cp lab08 /home/rsimms/turnin/cis90/lab08.$LOGNAME
at> <Ctrl-D>
```

2. A **check8** script is available for Lab 8.

3. Note: Lab 9 and five posts due next week.

4. You can still send me your photo for our class page if you want 3 points extra credit.

5. You can still do the "your name in lights" extra credit activity. See forum for details.

Heads up on Final Exam

Test #3 (final exam) is MONDAY May 15th 7-9:50AM

Mon	5/15	**Test #3 (the final exam)** **Time** • MONDAY 7:00AM - 9:50AM in Room 828 **Materials** • Test (canvas) **CCC Confer** • Enter virtual classroom • Class archives		5 posts Lab X1 Lab X2

Extra credit labs and final posts due by 11:59PM

- All students will take the test at the same time. The test must be completed by 9:50AM.
- Working and long distance students can take the test online via CCC Confer and Canvas.
- Working students will need to plan ahead to arrange time off from work for the test.
- Test #3 is **mandatory** (even if you have all the points you want)

FINAL EXAMINATIONS SCHEDULE: SPRING 2017, May 15 to May 20

Daytime Classes: All times in bold refer to the beginning times of classes. **MW/Daily** means Monday alone, Wednesday alone, Monday and Wednesday **or any 3** or more days in any combination. **TTH** means Tuesday alone, Thursday alone, or Tuesday and Thursday. **Classes meeting other combinations of days and/or hours not listed must have a final schedule approved by their Division Dean.**

STARTING CLASS TIME/DAY(S)	EXAM HOUR	EXAM DATE
Classes starting between:		
6:30 am and 8:55 am, MW/Daily	7:00 am-9:50 am	Wednesday, May 17
9:00 am and 10:15 am, MW/Daily	7:00 am-9:50 am	Monday, May 15
10:20 am and 11:35 am, MW/Daily	10:00 am-12:50 pm	Wednesday, May 17
11:40 am and 12:55 pm, MW/Daily	10:00 am-12:50 pm	Monday, May 15
1:00 pm and 2:15 pm, MW/Daily	1:00 pm-3:	
2:20 pm and 3:35 pm, MW/Daily	1:00 pm-3:	
3:40 pm and 5:30 pm, MW/Daily	4:00 pm-6:	
6:30 am and 8:55 am, TTh	7:00 am-9:	
9:00 am and 10:15 am, TTh	7:00 am-9:	
10:20 am and 11:35 am, TTh	10:00 am-12	
11:40 am and 12:55 pm, TTH	10:00 am-12	
1:00 pm and 2:15 pm, TTh	1:00 pm-3:	
2:20 pm and 3:35 pm, TTh	1:00 pm-3:	
3:40 pm and 5:30 pm, TTh	4:00 pm-6:	
Friday am	9:00 am-11	
Friday pm	1:00 pm-3:	
Saturday am	9:00 am-11	
Saturday pm	1:00 pm-3:	

CIS 90 Introduction to UNIX/Linux

Provides a technical overview of the UNIX/Linux operating system, including hands-on experience with commands, files, and tools. Recommended Preparation: CIS 1L or CIS 72.
Transfer Credit: Transfers to CSU; UC

Section	Days	Times	Units	Instructor	Room
95746	W	9:00AM-12:05PM	3.00	R.Simms	OL
&	Arr.	Arr.		R.Simms	OL

Section 95746 is an ONLINE course. Meets weekly throughout the semester online during the scheduled times by remote technology with an additional 50 min arranged online lab per week. For details, see instructor's web page at go.cabrillo.edu/online.

95747	W	9:00AM-12:05PM	3.00	R.Simms	828
&	Arr.	Arr.		R.Simms	OL

Section 95747 is a Hybrid ONLINE course. Meets weekly throughout the semester at the scheduled times with an additional 50 min online lab per week. For details, see instructor's web page at go.cabrillo.edu/online.

Where to find your grades

Send me your survey to get your LOR code name.

The CIS 90 website Grades page

http://simms-teach.com/cis90grades.php



Or check on Opus

`checkgrades` *`codename`*

(where codename is your LOR codename)



Written by Jesse Warren a past CIS 90 Alumnus

Percentage	Total Points	Letter Grade	Pass/No Pass
90% or higher	504 or higher	A	Pass
80% to 89.9%	448 to 503	B	Pass
70% to 79.9%	392 to 447	C	Pass
60% to 69.9%	336 to 391	D	No pass
0% to 59.9%	0 to 335	F	No pass

At the end of the term I'll add up all your points and assign you a grade using this table

Points that could have been earned:

7 quizzes:	21 points
7 labs:	210 points
2 tests:	60 points
2 forum quarters:	40 points
Total:	**331 points**

grep workout

Some perfect times to use the **grep** command:

1) To search through the output of a command for some text

```
command | grep "text string"
```

2) To search inside one or more files for some text

```
grep "text string" file1 file2 … fileN
```

3) To search (recursively) inside all files in a branch of the UNIX file tree for some text

```
grep –R "text string" directory
```

grep usage – search output of a command

Is the CUPS daemon (print service) running right now?

```
/home/cis90/simben $ ps -ef | grep cups
root      6251     1  0 Jul31 ?        00:00:04 cupsd -C /etc/cups/cupsd.conf
simben90 27027 26966  0 08:47 pts/3    00:00:00 grep cups
```

Yes it is, with PID=6251

grep practice

Is the cronjob daemon (**crond**) running right now?

If so, type the crond PID into the chat window

grep usage – search output of a command

Is the Apache web server (httpd) installed?

This shows all installed package names

This searches for package names containing "httpd"

```
/home/cis90/simben $ rpm -qa | grep httpd
httpd-tools-2.2.15-47.el6.centos.i686
httpd-2.2.15-47.el6.centos.i686
httpd-manual-2.2.15-47.el6.centos.noarch
```

Yes, version 2.2.15 has been installed

grep practice

Has the **mysql-server** package been installed on Opus?

If so, type the version of mysql-server in the chat window

grep usage – search output of a command

When were the last 5 times I logged in?

```
/home/cis90/simben $ last | grep $LOGNAME | head -n5
simben90 pts/0        50-0-68-235.dsl. Mon Apr 23 05:39   still logged in
simben90 pts/6        10.64.25.2       Wed Apr 18 12:48 - 16:51  (04:02)
simben90 pts/5        10.64.25.2       Wed Apr 18 12:48 - 16:51  (04:02)
simben90 pts/4        10.64.25.2       Wed Apr 18 12:48 - 16:51  (04:03)
simben90 pts/1        50-0-68-235.dsl. Wed Apr 18 09:06 - 10:23  (01:17)
```

This scans the latest wtmp log file and lists your most recent five logins to Opus

grep practice

For the time period covered by the current wtmp log file. What was the date of your earliest login?

Type your earliest login date into the chat window

grep usage – search output of a command

```
[rsimms@oslab ~]$ ls /bin/*sh
/bin/bash  /bin/csh  /bin/dash  /bin/ksh  /bin/rbash  /bin/sh  /bin/tcsh

[rsimms@oslab ~]$ ksh
$ dash
$ sh
sh-4.1$ csh
```

Look familiar? (lab 8) Shows how to compare shells by size and record the biggest one in a file.

size

```
[rsimms@oslab ~]$ ps -l
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
0 S   201 26146 26145  0  80   0 -  1700 -      pts/3    00:00:00 bash
0 S   201 26337 26146  0  80   0 -  1429 -      pts/3    00:00:00 ksh
0 S   201 26343 26337  0  80   0 -   524 -      pts/3    00:00:00 dash
0 S   201 26346 26343  0  80   0 -  1314 -      pts/3    00:00:00 sh
0 S   201 26348 26346  0  80   0 -  1332 -      pts/3    00:00:00 csh
0 R   201 26362 26348  9  80   0 -  1220 -      pts/3    00:00:00 ps

[rsimms@oslab ~]$ ps -l | grep bash
0 S   201 26146 26145  0  80   0 -  1700 -      pts/3    00:00:00 bash

[rsimms@oslab ~]$ ps -l | grep bash > bigshell

[rsimms@oslab ~]$ cat bigshell
0 S   201 26146 26145  0  80   0 -  1700 -      pts/3    00:00:00 bash
```

grep practice

Instructor note: add write permission to others on Benji's terminal device

- Run **bash**, **dash**, **ksh**, **sh** and **csh** shells and use **ps -l** to see which is the smallest.
- Redirect the line of **ps -l** output for the smallest shell to Benji Simms's terminal: **/dev/pts/??**
- Sign it with **echo "From *first name*" > /dev/pts/??**
- Then **exit** each shell till your are back to just one bash shell running.

grep usage – search inside files

How many CIS 90 user accounts are there?

```
/home/cis90/simben $ grep :190: /etc/passwd | wc -l
35

/home/cis90/simben $ grep cis90 /etc/passwd | wc -l
35

/home/cis90/simben $ grep "^.\{2,6\}90" /etc/passwd | wc -l
35
```

FYI only

There are 35

The third example is a "regular expression". For more information see the Resources page of the website.

grep practice

How many CIS 72 accounts are there on Opus?

Type the number of CIS 72 accounts into the chat window

grep usage – search inside files

Example: What is my account information in /etc/passwd?

```
/home/cis90/simben $ grep $LOGNAME /etc/passwd
simben90:x:1000:90:Benji Simms:/home/cis90/simben:/bin/bash
```

or

```
/home/cis90/simben $ grep simben90 /etc/passwd
simben90:x:1000:90:Benji Simms:/home/cis90/simben:/bin/bash
```

or

```
/home/cis90/simben $ cat /etc/passwd | grep $LOGNAME
simben90:x:1000:90:Benji Simms:/home/cis90/simben:/bin/bash
```

Note the field separator used in /etc/passwd is a ":"

grep practice

Does your user ID in */etc/passwd* match the uid output by the **id** command?

*Type your answer (yes or no) and your uid from the **id** command into the chat window*

grep usage – search inside files in all or part of the file tree

Where does the PS1 "prompt" variable get set?

```
/home/cis90/rodduk $ grep -R "PS1=" /etc/bash* $HOME 2> /dev/null
/etc/bash_completion.d/git:#        PS1='[\u@\h \W$(__git_ps1 "
(%s)")]\$ '
/etc/bashrc:  [ "$PS1" = "\\s-\\v\\$ " ] && PS1="[\u@\h \W]\\$ "
/etc/bashrc:  #   PS1="[\u@\h:\l \W]\\$ "
/home/cis90/rodduk/.bash_profile:PS1='$PWD $ '
/home/cis90/rodduk $
```

It is set more than once during login. We will learn in a future lesson that the one in .bash_profile is done last and is what you end up using.

grep usage – search inside files in all or part of the file tree

This time in color using --color option

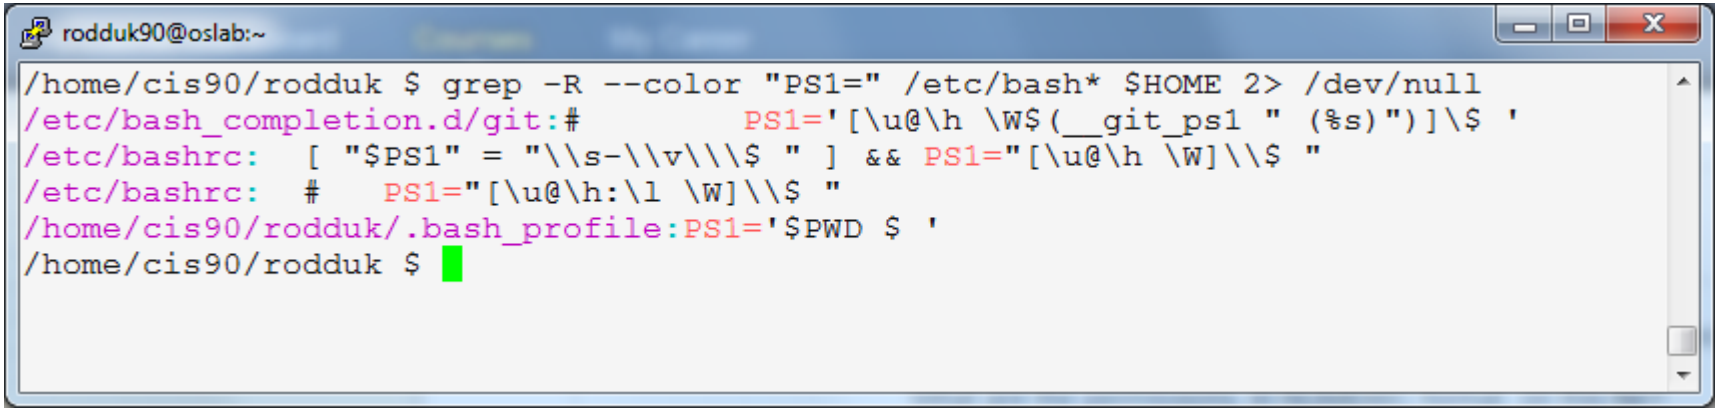

grep practice

Find the file in the */usr/lib* portion of the file tree that contains "hot pototo dance" (yes, potato is misspelled).

Type the absolute pathname of the file in the chat window.

Shell
Six Steps
(REVIEW)

Example Command

This is Benji's home directory

```
/home/cis90/simben $ ls -F
1968.egg  class/       edits/     fun/      lab01-collection  log      redhat/
africa/   dead.letter  errors     Hidden/   lab02-collection  mbox     sawyer
Apple/    debian/      etc/       HP/       lab04-mydata      misc/    slackware/
basket/   Dell/        f1.graded  island/   lesson7/          mylog    stuff
bigfile   Directory3/  f2.graded  jobs/     letter            normal   uhistory
bin/      docs/        five       L7-fun/   letter.bak        poems/
/home/cis90/simben $
```

Benji wants to find some eggs and types this command

```
/home/cis90/simben $ find / -name *egg 2> /dev/null
```

Write what you think will happen in the chat window

Example Command

```
/home/cis90/simben $ find / -name *egg 2> /dev/null
/home/cis90/bomnic/1968.egg
/home/cis90/cis/1968.egg
/home/cis90/cormax/1968.egg
/home/cis90/jorwes/1968.egg
/home/cis90/bownic/1968.egg
/home/cis90/rodduk/1968.egg
/home/cis90/tosbre/1968.egg
/home/cis90/jordan/basket/1968.egg
/home/cis90/tinsam/1968.egg
/home/cis90/milhom/1968.egg
/home/cis90/bancar/1968.egg
< snipped >
/home/cis90/miljac/1968.egg
/home/cis90/stejad/basket/1968.egg
/home/cis90/simben/1968.egg
/home/cis90/hunbra/1968.egg
/home/cis90/specod/1968.egg
/home/cis90/temtyl/1968.egg
/home/cis90/watshe/1968.egg
/home/cis90/hawjus/1968.egg
/home/cis90/simreb/basket/1968.egg
/home/cis90/seasky/1968.egg
/home/cis90/brinic/1968.egg
/home/cis90/simben $
```

Note: Benji has a file named 1968.egg in his home directory

Prompt Step

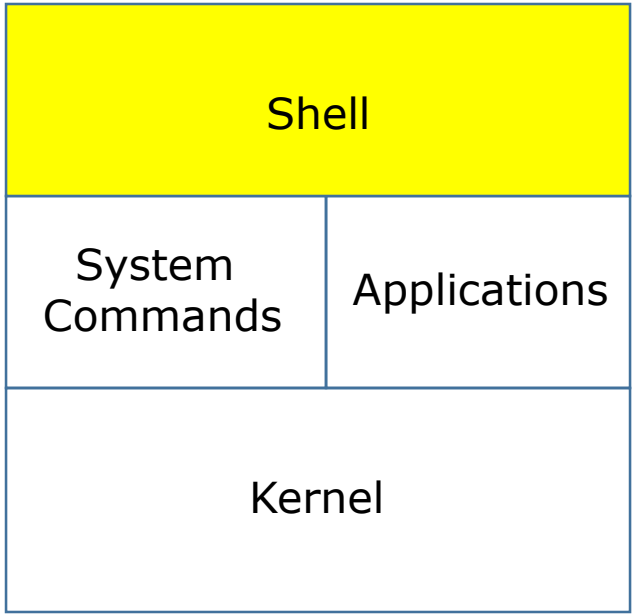

1) **Prompt**
2) Parse
3) Search
4) Execute
5) Nap
6) Repeat

Prompt Step
(uses PS1 variable)

```
/home/cis90/simben $
```

bash using your PS1 variable creates and outputs your prompt which is written to your terminal device

- Benji is using the bash shell. There are many other shells such as sh, ksh and csh. In */etc/passwd* the last field in the line for his account determines the shell that is run when logging in.

```
/home/cis90/simben $ grep $LOGNAME /etc/passwd
simben90:x:1001:190:Benji Simms:/home/cis90/simben:/bin/bash
```

- The bash program resides in the */bin* directory.

```
/home/cis90/simben $ ls -l /bin/bash
-rwxr-xr-x. 1 root root 874248 May 10  2012 /bin/bash
```

- The command prompt appearance is defined by the PS1 variable. You can output a prompt yourself using **echo $PS1**

```
/home/cis90/simben $ echo $PS1
$PWD $
/home/cis90/simben $ echo $PWD $
/home/cis90/simben $
/home/cis90/simben $
```

Prompt Step

Note there is an invisible <newline> metacharacter at the end of the command

```
/home/cis90/simben $ find / -name *egg 2> /dev/null
```

Benji types this find command in response to the shell prompt

The prompt step is not complete until the user type the Enter/Return key

Parse Step

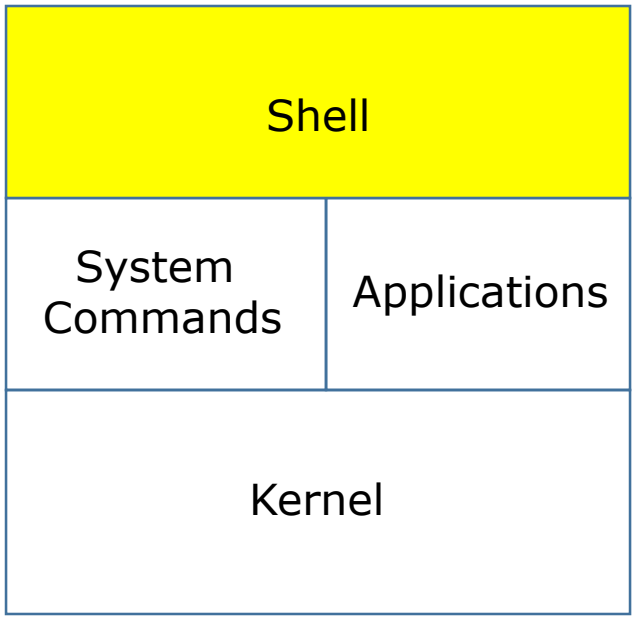

1) Prompt
2) **Parse**
3) Search
4) Execute
5) Nap
6) Repeat

Parse Step

The shell uses spaces to separate options, arguments and redirection

```
find / -name *egg 2> /dev/null
```

The shell must expand filename expansion characters and variables during the parse step. Note there is an invisible <newline> metacharacter at the end of the command

Parsing RESULTS:

Command: **find**

Options and arguments:
- **/**
- **-name**
- **1968.egg**

This will be passed to the command (if the command can be located on the path)

Redirection:
Connect **stderr** to **/dev/null** (the "bit bucket")

This will be handled by the shell. The command, if loaded, will not see this

*Note: Because Benji had a 1968.egg file in his home directory, the shell expands *egg to 1968.egg*

Search Step

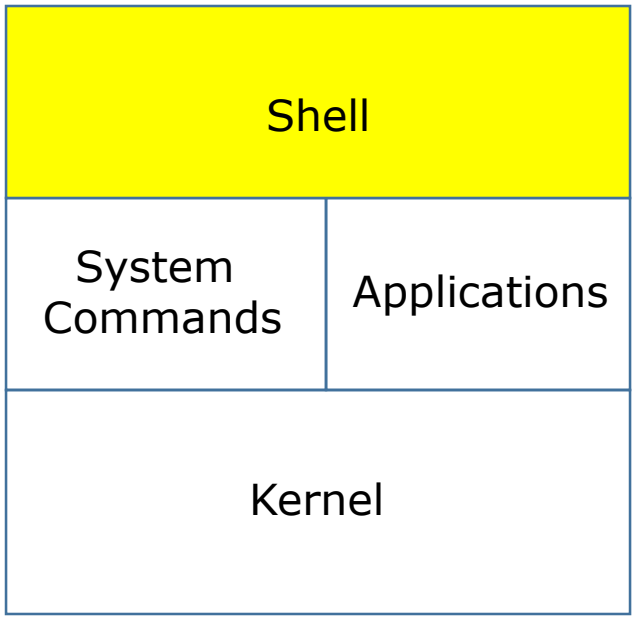

1) Prompt
2) Parse
3) **Search**
4) Execute
5) Nap
6) Repeat

Search Step

(uses PATH variable)

Command: **find**

*The shell now must search, in order, every directory on Benji's path to locate the first occurrence of the **find** command.*

Benji's path is defined by the value of his PATH variable

1st directory searched: /usr/lib/qt-3.3/bin
2nd directory searched: /usr/local/bin
3rd directory searched: /bin
4th directory searched: /usr/bin
5th directory searched: /usr/local/sbin
6th directory searched: /usr/sbin
7th directory searched: /sbin
8th directory searched: /home/cis90/simben/../bin
9th directory searched: /home/cis90/simben/bin
10th directory searched: .

The shell locates the find command in the /bin directory

```
/home/cis90/simben $ echo $PATH
/usr/lib/qt-3.3/bin:/usr/local/bin:/bin:/usr/bin:/usr/local/sbin:/usr/sbin:/sbin:/home/cis90/simben/../bin:/home/cis90/simben/bin:.
/home/cis90/simben $ type find
find is /bin/find
```

Execute Step

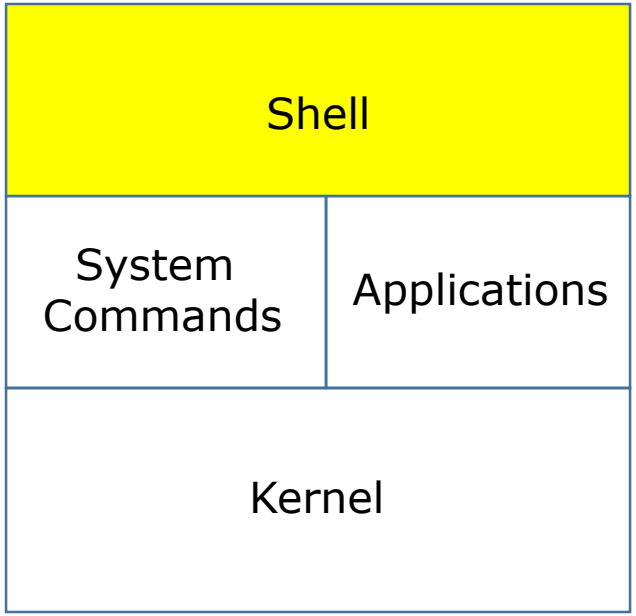

1) Prompt
2) Parse
3) Search
4) **Execute**
5) Nap
6) Repeat

Execute Step

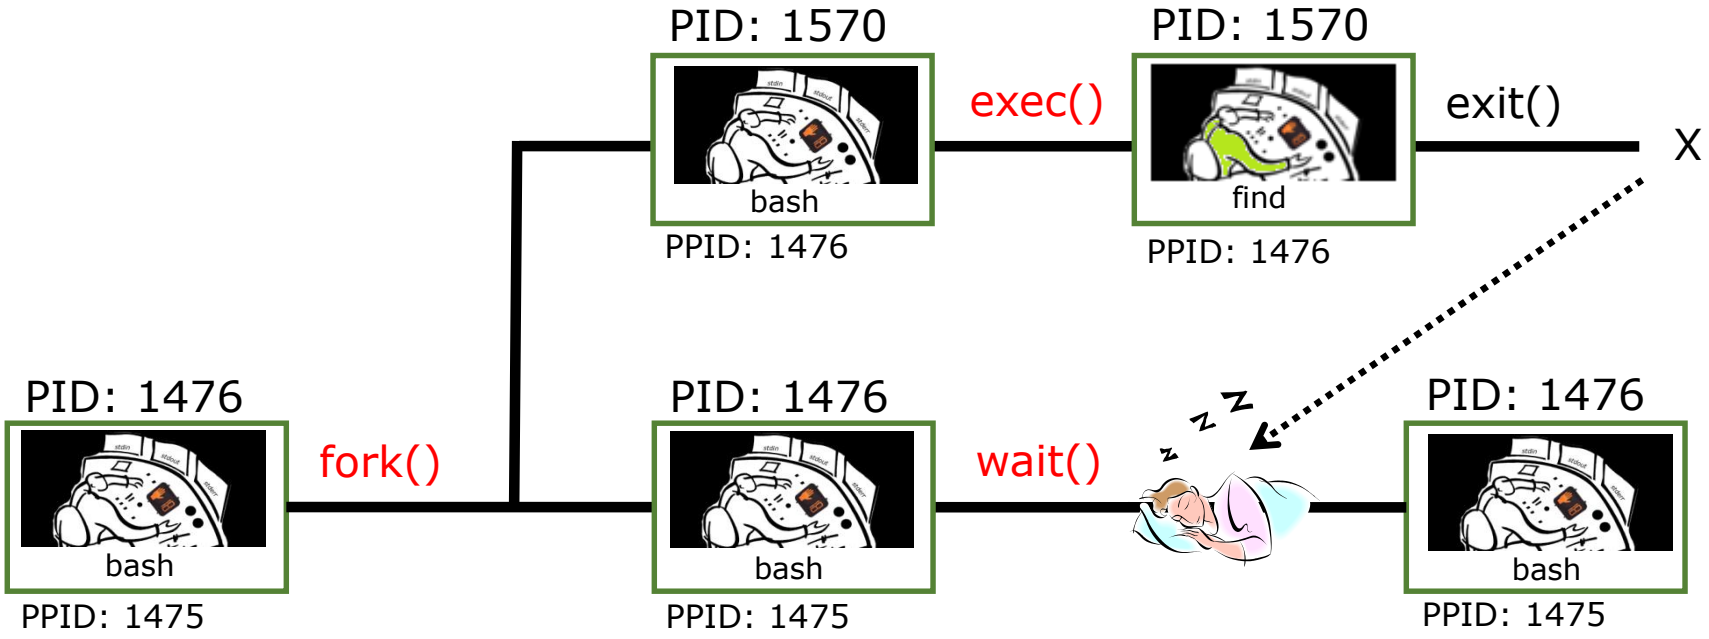

bash executes the **find** command by:

1) Cloning itself with a **fork()** system call to create a new child process.
2) With an **exec()** system call, the new child process is overlaid with the **find** code instructions.
3) bash sleeps by making a **wait()** system call while the find child process runs.
4) The child process makes an **exit()** system call when it has finished.
5) After that, the parent bash process wakes up and the child process is killed.

Execute Step

```
/home/cis90/simben $ find / -name *egg 2> /dev/null
```

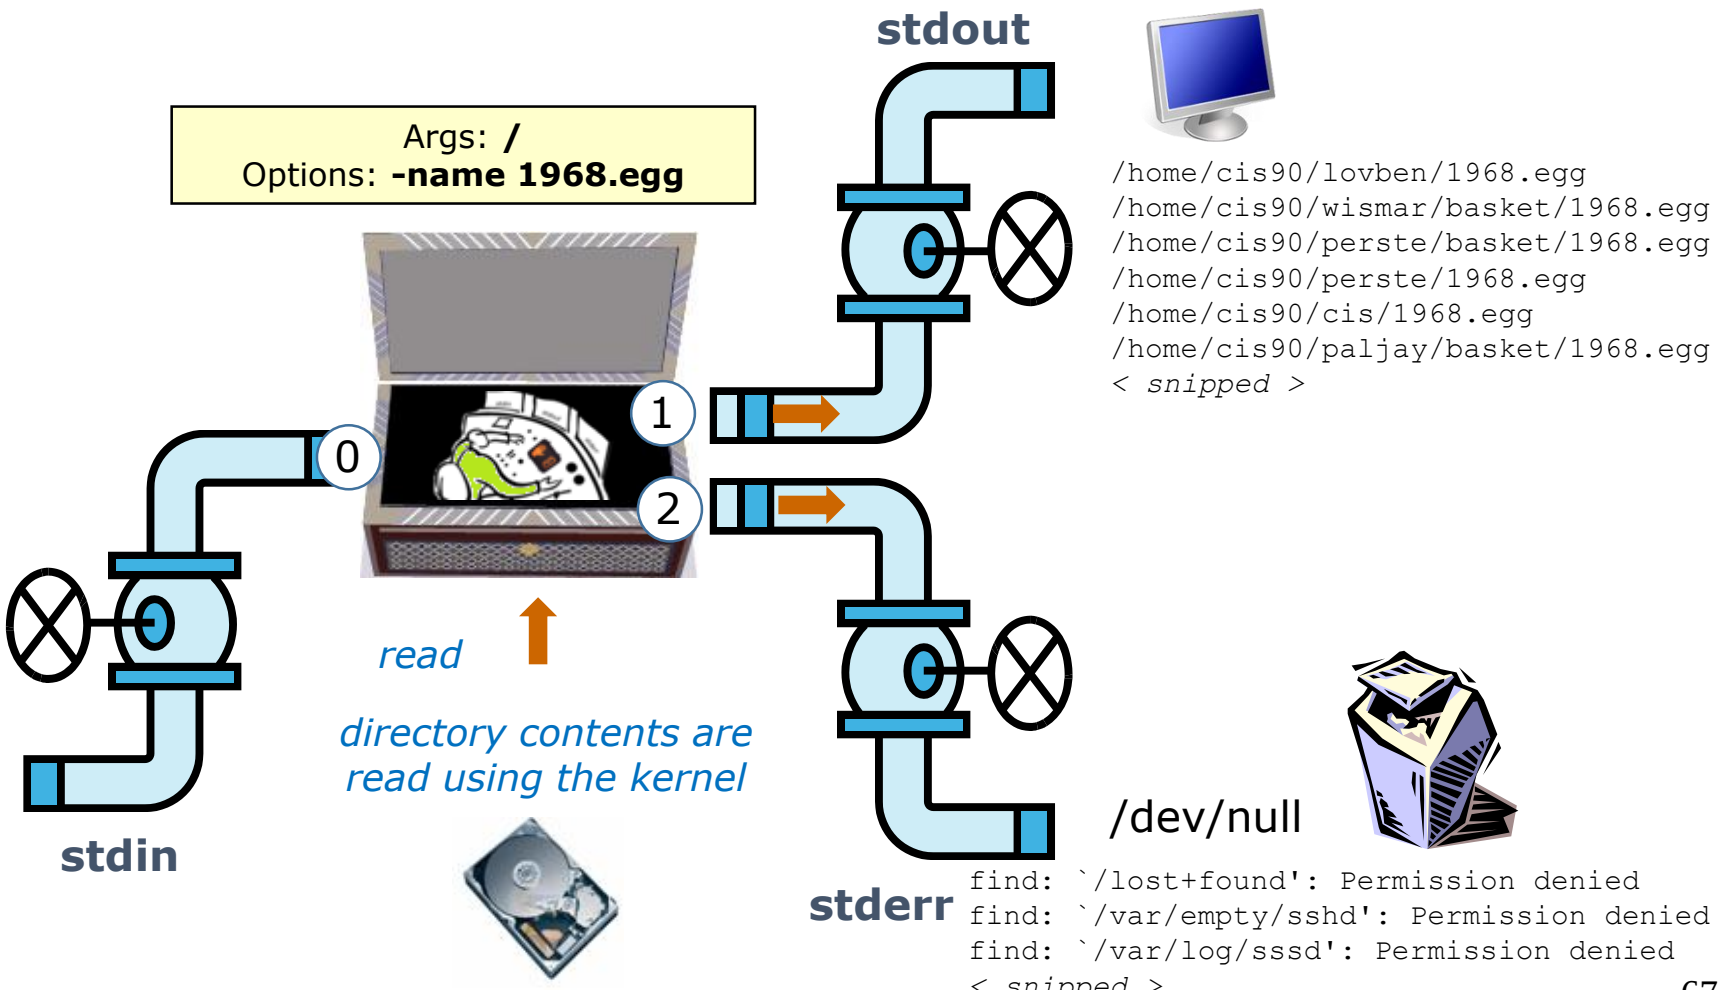

This is what the find process might look like

A **process:**

- Is provided with parsed & expanded options and arguments from the shell

- may read from **stdin**
- may write to **stdout**
- may write error messages to **stderr**

- and may get interrupted from time to time by a **signal**

*The **find** process is running*

Nap Step

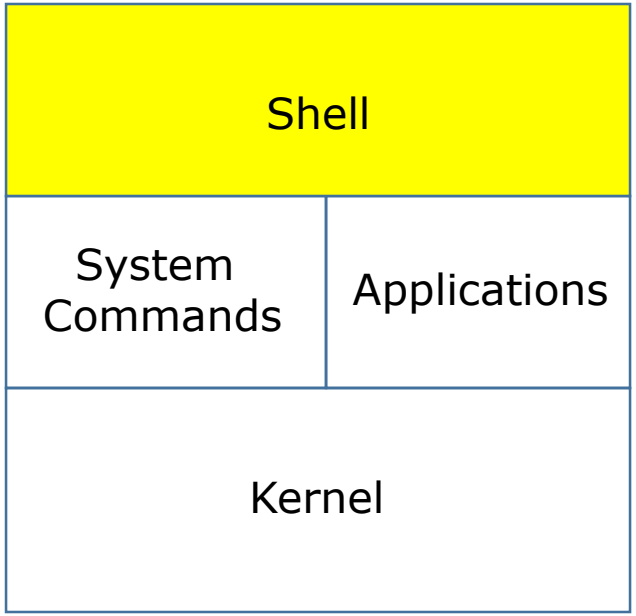

1) Prompt
2) Parse
3) Search
4) Execute
5) **Nap**
6) Repeat

Nap Step

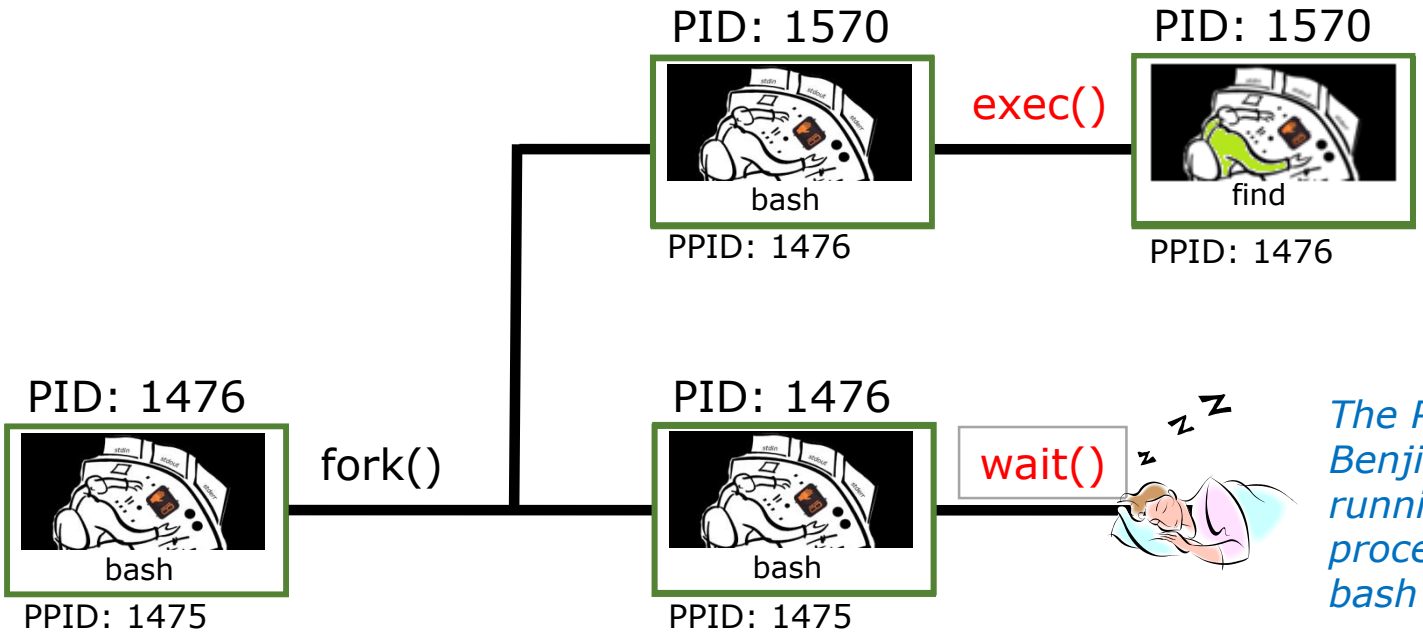

*The PS command shows Benji's **find** command is running as a child process while the parent bash shell sleeps*

Sleeping

```
[rsimms@oslab ~]$ ps -l -u simben90
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
5 S  1001  1475  1470  0  80   0 -  3392 ?      ?        00:00:00 sshd
0 S  1001  1476  1475  0  80   0 -  1308 ?      pts/1    00:00:00 bash
0 R  1001  1570  1476 40  80   0 -  1179 ?      pts/1    00:00:00 find
```

Parent

Child

Running

Repeat Step

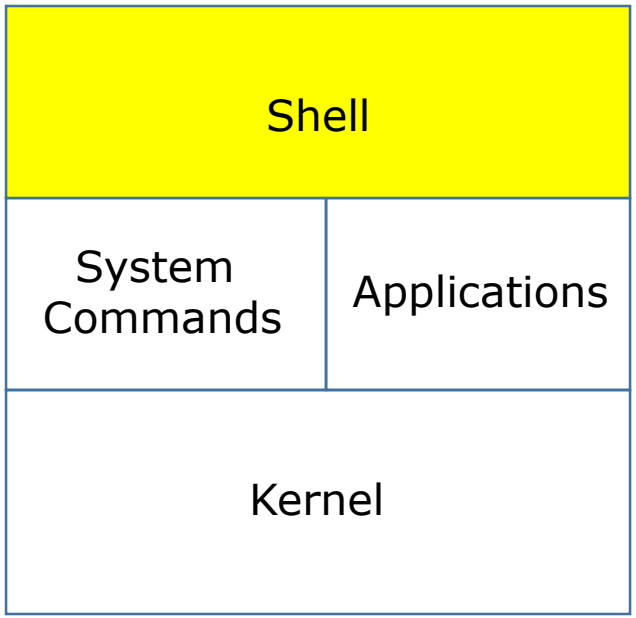

1) Prompt
2) Parse
3) Search
4) Execute
5) Nap
6) **Repeat**

Repeat Step

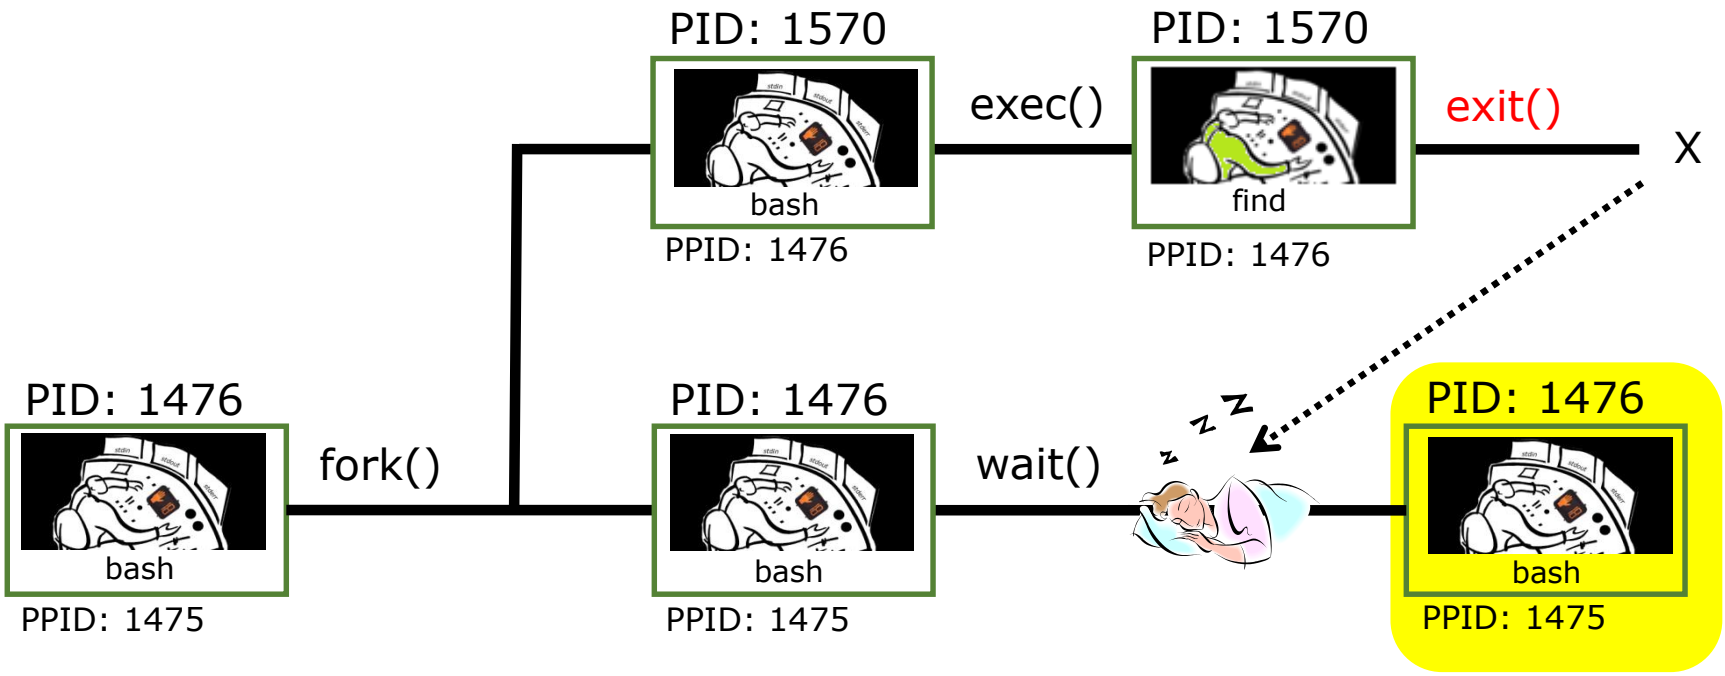

*The child process makes an **exit()** system call when it has finished. The parent bash process wakes up, the child process is killed and we are ready to start the process all over again with the next command.*

Process activity

- Start a second login session and see if you can illustrate the parent sleeping while a child runs.
- In one session run: **`grep -r "pototo" /usr`**
- In the second session use repeatedly: **`ps -lu $LOGNAME`**
- The **ps** output should show "parent" bash S=Sleeping while the "child" **grep** command is either R=Running or in D=Uninterruptible sleep (IO)

```
simben90@oslab:~
/home/cis90/simben $ grep -r "pototo" /usr/lib /usr/src
grep: /usr/lib/audit: Permission denied
/usr/lib/perl5/Net/DNS/Resolver/Recurse.pm:# Purpose: Do that "hot pototo dance"
 on args.
grep: /usr/lib/cups/backend/serial: Permission denied
grep: /usr/lib/cups/backend/ipp: Permission denied
grep: /usr/lib/cups/backend/http: Permission denied
grep: /usr/lib/cups/backend/dnssd: Permission denied
grep: /usr/lib/cups/backend/lpd: Permission denied
grep: /usr/lib/cups/backend/mdns: Permission denied
grep: /usr/lib/cups/backend/https: Permission denied
/home/cis90/simben $
```

Write your grep status and PID into the chat window

```
5 S  1001  8841  8820  0  80   0 -  2899 ?      ?        00:00:00 sshd
0 S  1001  8842  8841  0  80   0 -  1308 ?      pts/0    00:00:00 bash
0 D  1001  9032  8842 21  80   0 -  1369 ?      pts/0    00:00:02 grep
/home/cis90/guest $ ps -lu simben90
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
4 S  1001  6283  6270  0  80   0 -  1308 ?      pts/1    00:00:00 bash
5 S  1001  8841  8820  0  80   0 -  2899 ?      ?        00:00:00 sshd
0 S  1001  8842  8841  0  80   0 -  1308 ?      pts/0    00:00:00 bash
0 D  1001  9032  8842 21  80   0 -  1369 ?      pts/0    00:00:02 grep
/home/cis90/guest $ ps -lu simben90
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
4 S  1001  6283  6270  0  80   0 -  1308 ?      pts/1    00:00:00 bash
5 S  1001  8841  8820  0  80   0 -  2899 ?      ?        00:00:00 sshd
0 S  1001  8842  8841  0  80   0 -  1308 ?      pts/0    00:00:00 bash
0 R  1001  9032  8842 23  80   0 -  1369 ?      pts/0    00:00:03 grep
/home/cis90/guest $
```

Signals (Review)

Signals

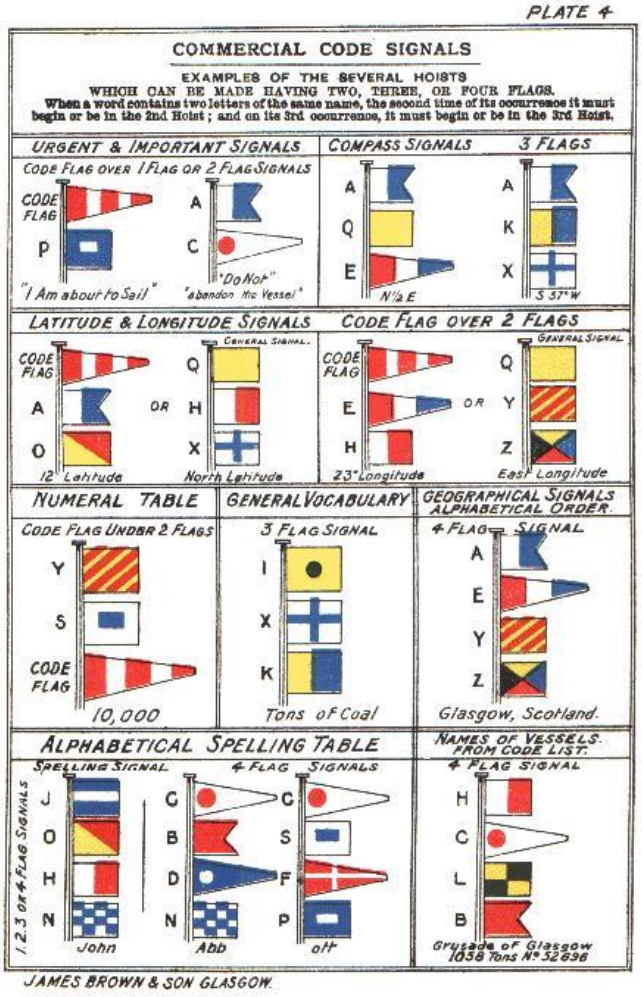
PLATE 4
COMMERCIAL CODE SIGNALS
EXAMPLES OF THE SEVERAL HOISTS
WHICH CAN BE MADE HAVING TWO, THREE, OR FOUR FLAGS.
When a word contains two letters of the same name, the second time of its occurrence it must begin or be in the 2nd Hoist; and on its 3rd occurrence, it must begin or be in the 3rd Hoist.
URGENT & IMPORTANT SIGNALS
CODE FLAG OVER 1 FLAG OR 2 FLAG SIGNALS
CODE FLAG
P
"I Am about to Sail"
A
C
"Do Not" "abandon the Vessel"
COMPASS SIGNALS
A
Q
E
N½E
3 FLAGS
A
K
X
S 57°W
LATITUDE & LONGITUDE SIGNALS
CODE FLAG
A
O
12° Latitude
GENERAL SIGNAL.
Q
OR
H
X
North Latitude
CODE FLAG OVER 2 FLAGS
CODE FLAG
E
H
23° Longitude
GENERAL SIGNAL
Q
OR
Y
Z
East Longitude
NUMERAL TABLE
CODE FLAG UNDER 2 FLAGS
Y
S
CODE FLAG
10,000
GENERAL VOCABULARY
3 FLAG SIGNAL
I
X
K
Tons of Coal
GEOGRAPHICAL SIGNALS ALPHABETICAL ORDER.
4 FLAG SIGNAL
A
E
Y
Z
Glasgow, Scotland.
ALPHABETICAL SPELLING TABLE
SPELLING SIGNAL
1.2.3 OR 4 FLAG SIGNALS
J
O
H
N
John
4 FLAG SIGNALS
C
B
D
N
Abd
C
S
F
P
off
NAMES OF VESSELS FROM CODE LIST.
4 FLAG SIGNAL
H
C
L
B
Gruzade of Glasgow
1058 Tons N° 32898
JAMES BROWN & SON GLASGOW.


20


U.S. ARMY SIGNAL

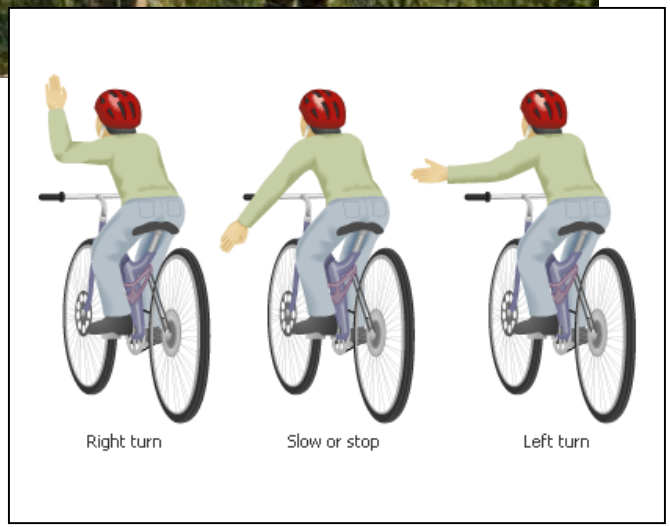
Right turn
Slow or stop
Left turn

This is what a process might look like

A **process:**

- Is provided with parsed/expanded options and arguments from the shell
- may read from **stdin**
- may write to **stdout**
- may write error messages to **stderr**
- and may get interrupted from time to time by a **signal**

*A **process** is a **program** that has been loaded into memory and is either running (executing instructions) or waiting to run*

Signals

The result of sending a signal to a process:

- be ignored
- default action (die)
- execute some predefined function

Signals

SIGHUP	1	Hangup (POSIX)	
SIGINT	2	Terminal interrupt (ANSI)	**Ctrl-C**
SIGQUIT	3	Terminal quit (POSIX)	**Ctrl-**
SIGILL	4	Illegal instruction (ANSI)	
SIGTRAP	5	Trace trap (POSIX)	
SIGIOT	6	IOT Trap (4.2 BSD)	
SIGBUS	7	BUS error (4.2 BSD)	
SIGFPE	8	Floating point exception (ANSI)	
SIGKILL	9	Kill (can't be caught or ignored) (POSIX)	
SIGUSR1	10	User defined signal 1 (POSIX)	
SIGSEGV	11	Invalid memory segment access (ANSI)	
SIGUSR2	12	User defined signal 2 (POSIX)	
SIGPIPE	13	Write on a pipe with no reader, Broken pipe (POSIX)	
SIGALRM	14	Alarm clock (POSIX)	
SIGTERM	15	Termination (ANSI)	

Use kill –l to see all signals

Signals

SIGSTKFLT	16	Stack fault
SIGCHLD	17	Child process has stopped or exited, changed (POSIX)
SIGCONT	18	Continue executing, if stopped (POSIX)
SIGSTOP	19	Stop executing(can't be caught or ignored) (POSIX)
SIGTSTP	20	Terminal stop signal (POSIX) **Ctrl-Z or Ctrl-F**
SIGTTIN	21	Background process trying to read, from TTY (POSIX)
SIGTTOU	22	Background process trying to write, to TTY (POSIX)
SIGURG	23	Urgent condition on socket (4.2 BSD)
SIGXCPU	24	CPU limit exceeded (4.2 BSD)
SIGXFSZ	25	File size limit exceeded (4.2 BSD)
SIGVTALRM	26	Virtual alarm clock (4.2 BSD)
SIGPROF	27	Profiling alarm clock (4.2 BSD)
SIGWINCH	28	Window size change (4.3 BSD, Sun)
SIGIO	29	I/O now possible (4.2 BSD)
SIGPWR	30	Power failure restart (System V)

Use kill –l to see all signals

Signals

Signals are asynchronous messages sent to processes

They can result in one of three courses of action:

1. be ignored,
2. default action (die)
3. execute some predefined function.

Signals are sent:

kill command

Using the kill command: **$ kill -# PID**

- Where # is the signal number and PID is the process id.
- if no number is specified, SIGTERM (-15) is sent.

Using special keystrokes

- limited to just a few signals
- limited to when you have control of the keyboard

Use kill –l to see all signals

Target Practice

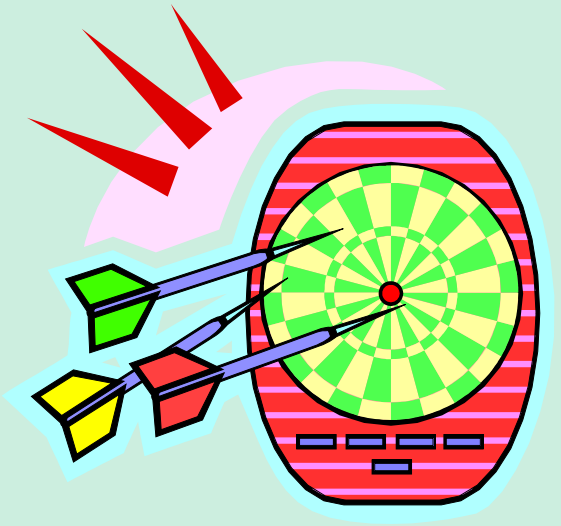

Activity

1) Run the **annoy** program

2) Try sending it a SIGINT with **Ctrl-C**

3) Try sending it a SIGQUIT with **Ctrl-**

4) Bring up another terminal and try signals 1 through 64
   - Use **ps –u $LOGNAME** to find the **annoy** *PID*

   - Try **kill -1 *PID***
   - Try **kill -2 *PID***
   - Try **kill -3 *PID***
   - *and so forth …*

   OR

   - Try **killall -1 annoy**
   - Try **killall -2 annoy**
   - Try **killall -3 annoy**
   - *and so forth …*

*Write the signals that kill **annoy** into the chat window*

Using &

to run a command in the background

Job Control

Using **&** to run a command in the background

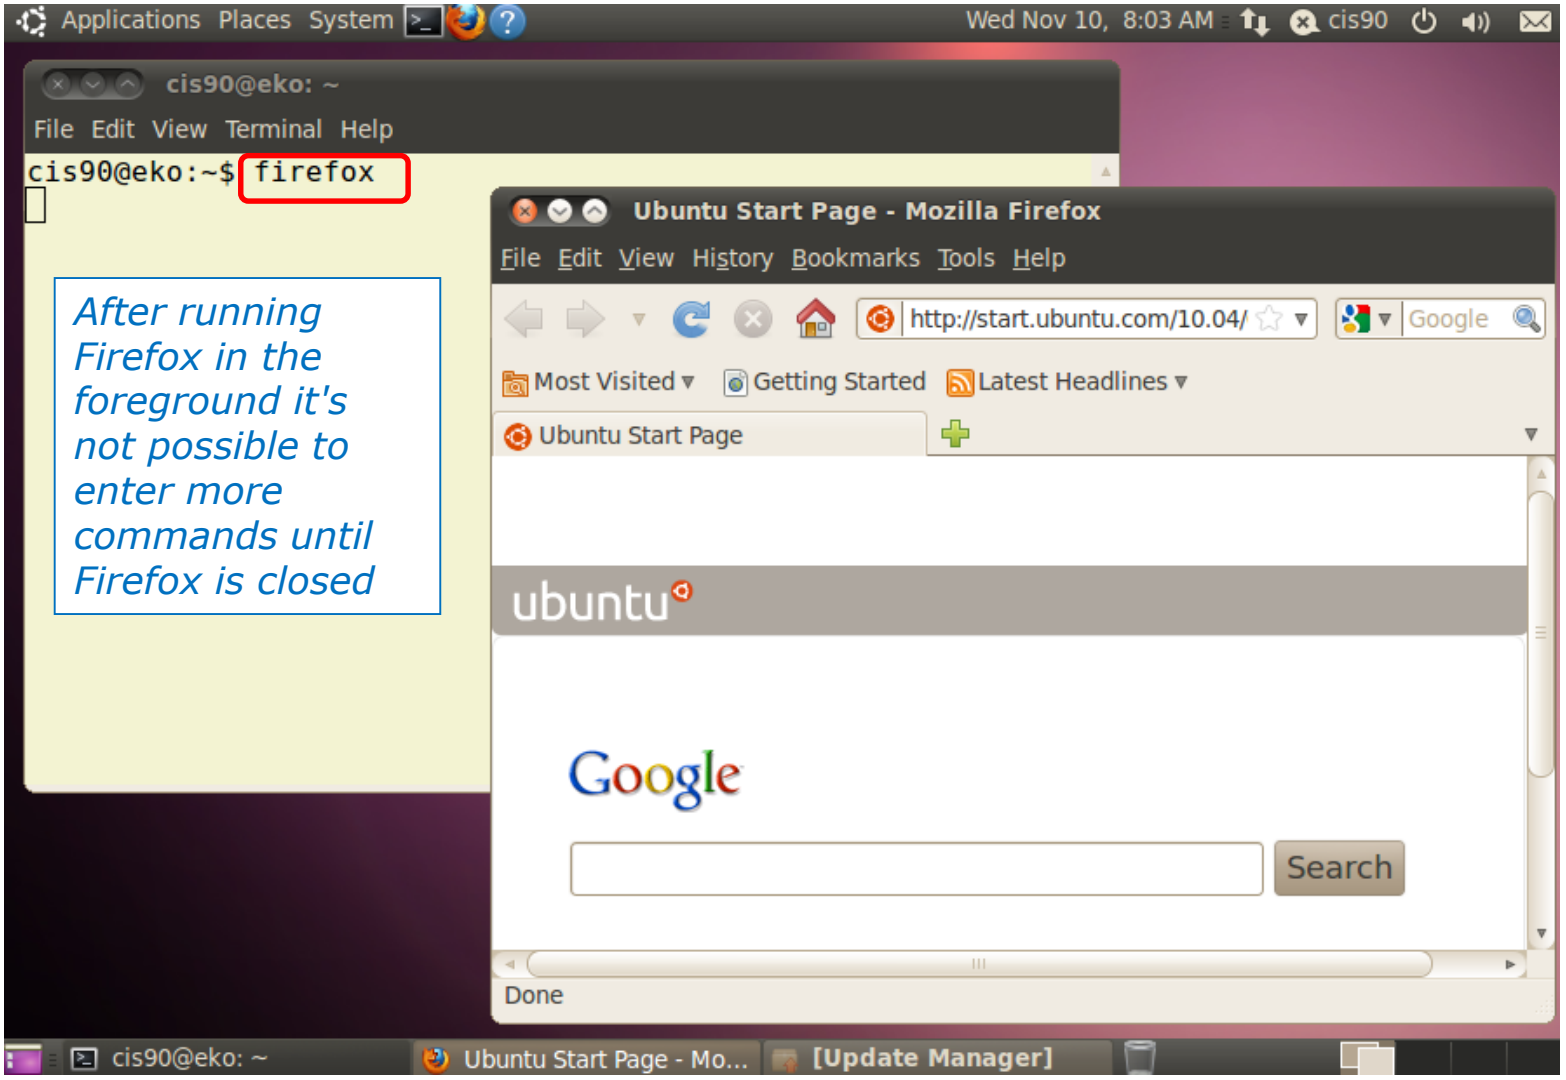

Job Control

Using **&** to run a command in the background

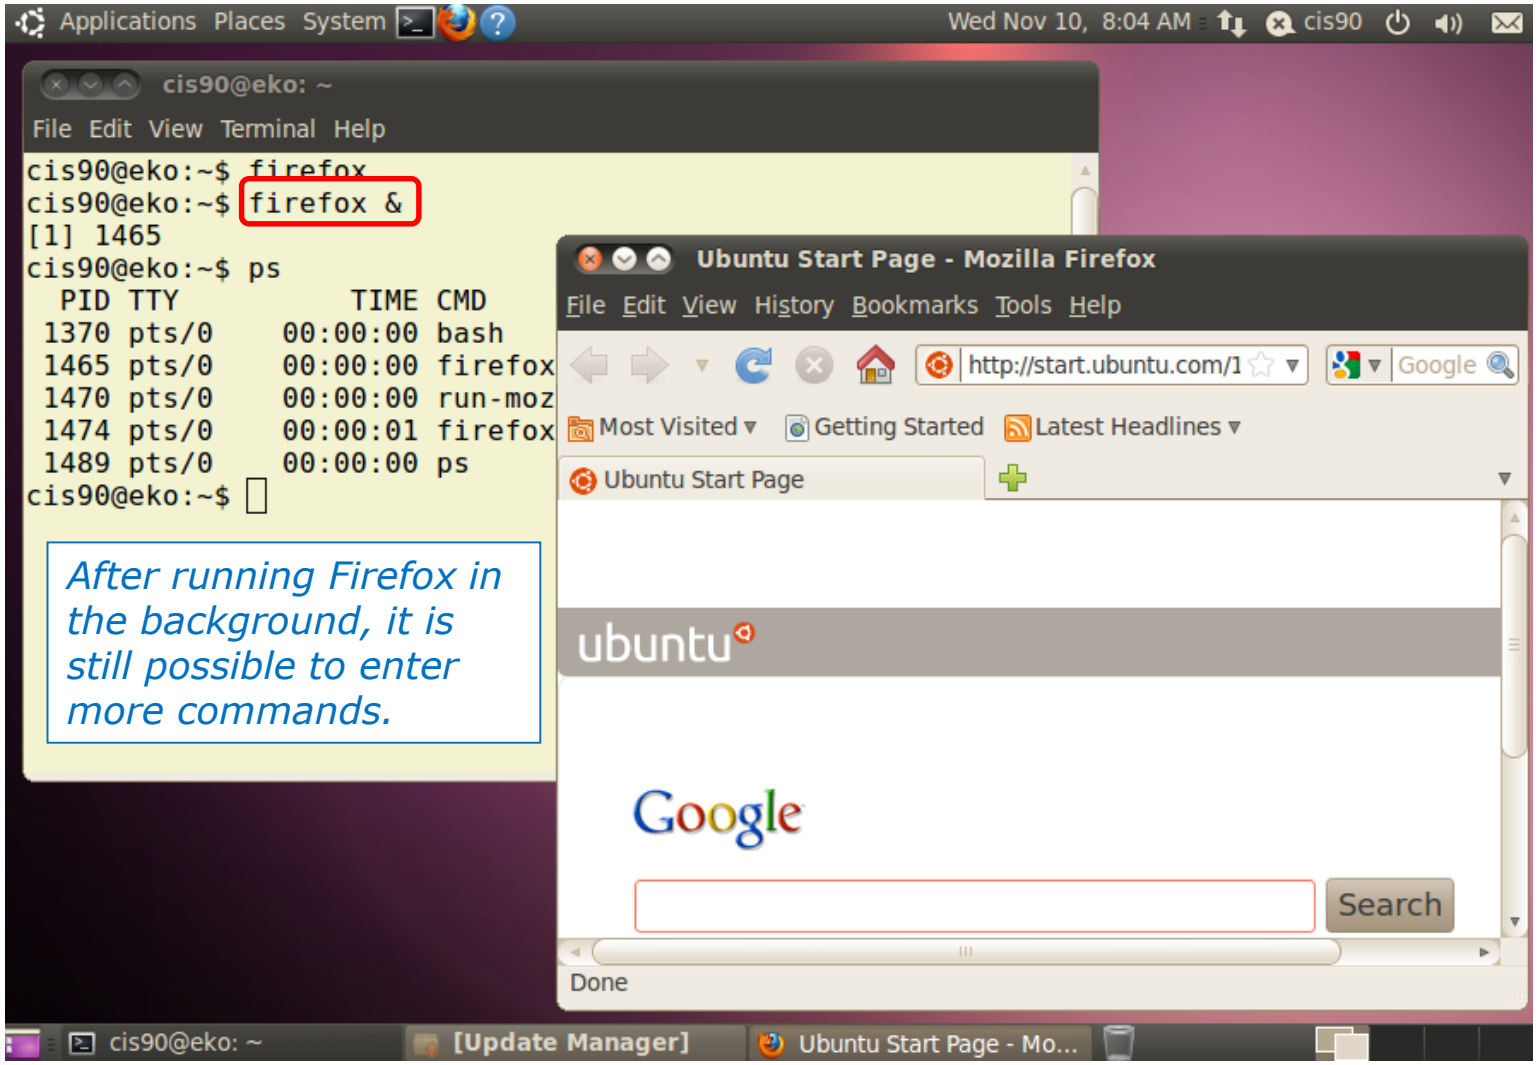

& append to a command to run it in the background

Example 1

```
/home/cis90/simben $ grep -r pototo /usr /opt 2> /dev/null
```

No prompt

For long running commands or scripts you must wait for the command to finish before you type more commands

Example 2

```
/home/cis90/simben $ grep -r pototo /usr /opt 2> /dev/null &
[1] 21175
/home/cis90/simben $ date
Tue Apr 15 14:43:09 PDT 2014
```

Hit enter to get the prompt and continue working while the find command runs in the background

Job Control (Review)

Job Control
A feature of the bash shell

&	Append to a command to run it in the background
bg	Resumes a suspended job in the background
fg	Brings the most recent background process to the foreground
jobs	Lists all background jobs

*Use **jobs**, **bg**, **fg** to list and resume jobs in the foreground or background*

Job Control
A feature of the bash shell

*When a process is **running** (status=R) the user can **stop** it (status=T) and choose whether it runs in the **background** or **foreground***

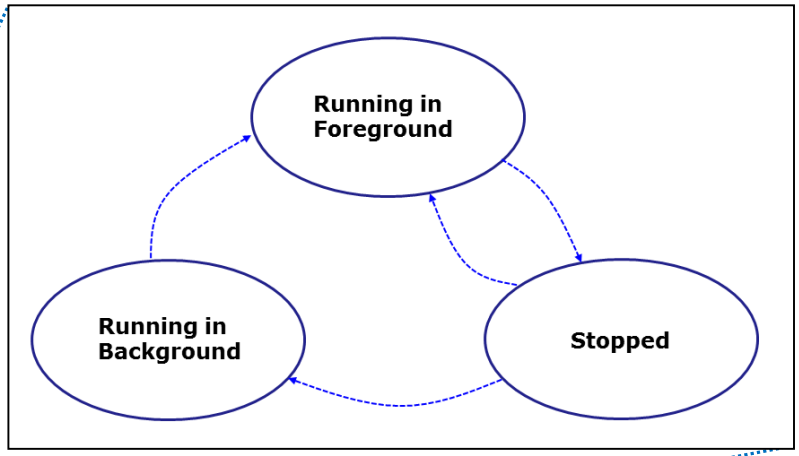

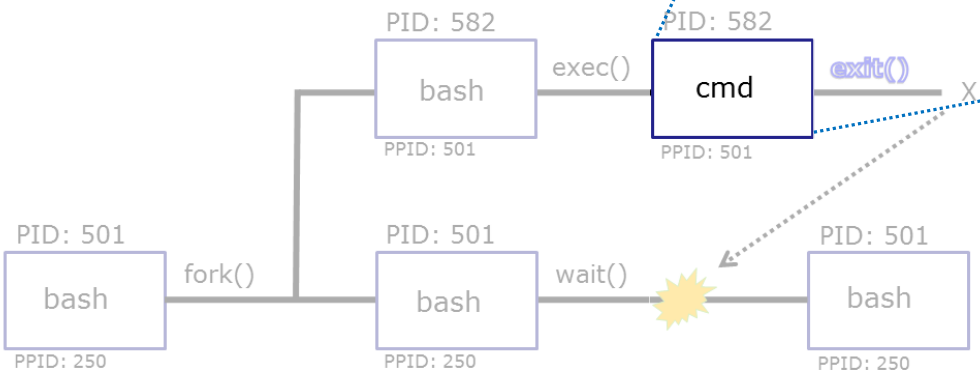

Job Control
A feature of the bash shell

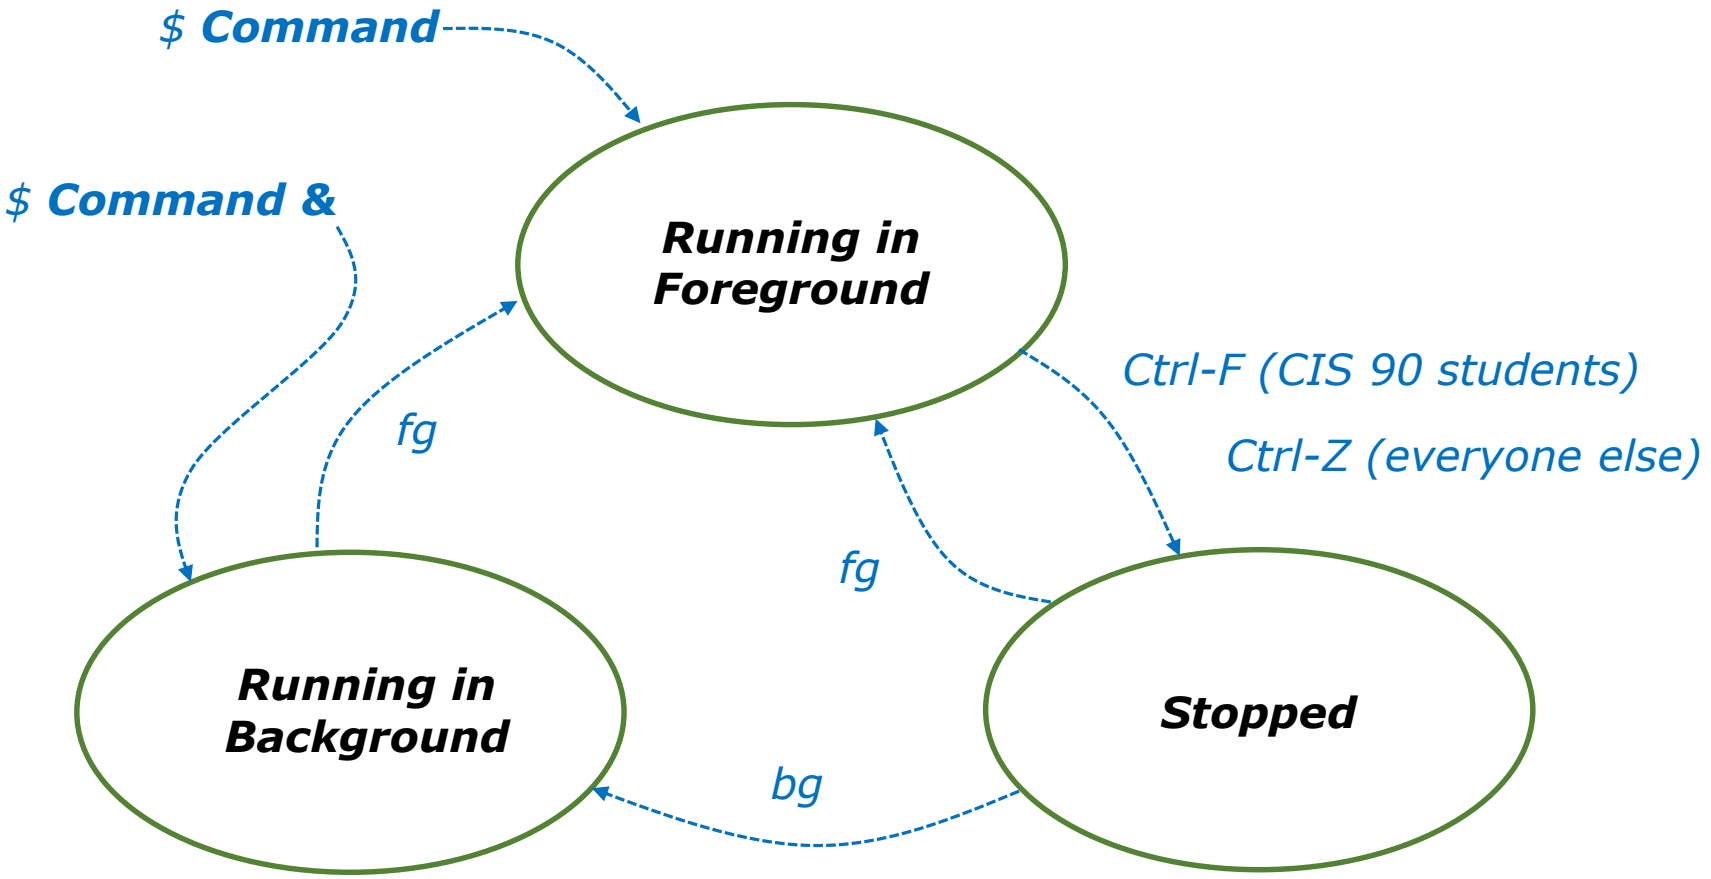

*Use the **jobs** command to view stopped and background jobs*

Job Control

Find out with keystroke combination is configured to suspend a process

```
/home/cis90ol/simmsben $ stty -a
speed 38400 baud; rows 24; columns 80; line = 0;
intr = ^C; quit = ^\; erase = ^?; kill = ^U; eof = ^D; eol = <undef>;
eol2 = <undef>; swtch = <undef>; start = ^Q; stop = ^S; susp = ^F; rprnt = ^R;
werase = ^W; lnext = ^V; flush = ^O; min = 1; time = 0;
-parenb -parodd cs8 -hupcl -cstopb cread -clocal -crtscts -cdtrdsr
-ignbrk -brkint -ignpar -parmrk -inpck -istrip -inlcr -igncr icrnl ixon -ixoff
-iuclc -ixany -imaxbel -iutf8
opost -olcuc -ocrnl onlcr -onocr -onlret -ofill -ofdel nl0 cr0 tab0 bs0 vt0 ff0
isig icanon iexten echo echoe echok -echonl -noflsh -xcase -tostop -echoprt
echoctl echoke
/home/cis90ol/simmsben $
```

In this case it is Ctrl-F that will be used to suspend a process

How is yours configured?

Job Control
Managing jobs

```
/home/cis90ol/simmsben $ sleep 120
Ctrl-Z or Ctrl-F (to suspend process)
[1]+  Stopped                 sleep 120

/home/cis90ol/simmsben $ sleep 110
Ctrl-Z or Ctrl-F (to suspend process)
[2]+  Stopped                 sleep 110

/home/cis90ol/simmsben $ sleep 100
Ctrl-Z or Ctrl-F (to suspend process)
[3]+  Stopped                 sleep 100

/home/cis90ol/simmsben $ jobs
[1]   Stopped                 sleep 120
[2]-  Stopped                 sleep 110
[3]+  Stopped                 sleep 100
```

Lets start up 3 sleep commands and suspend each of them.

Note: The sleep command is a simple way to run a command that will take awhile to finish.

***sleep 120** will last 120 seconds before it is finished.*

Job Control
Managing jobs

```
/home/cis90ol/simmsben $ jobs
[1]   Stopped                 sleep 120
[2]-  Stopped                 sleep 110
[3]+  Stopped                 sleep 100


/home/cis90ol/simmsben $ ps -l
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
0 S  1082  5364  5363  0  75   0 -  1168 wait   pts/2    00:00:00 bash
0 T  1082  5452  5364  0  75   0 -   929 finish pts/2    00:00:00 sleep
0 T  1082  5453  5364  0  75   0 -   929 finish pts/2    00:00:00 sleep
0 T  1082  5454  5364  0  75   0 -   929 finish pts/2    00:00:00 sleep
0 R  1082  5459  5364  0  77   0 -  1054 -      pts/2    00:00:00 ps
```

Note, all three processes are sTopped

Job Control
Managing jobs

```
/home/cis90ol/simmsben $ bg 2
[2]- sleep 110 &
/home/cis90ol/simmsben $ jobs
[1]-  Stopped                 sleep 120
[2]   Running                 sleep 110 &
[3]+  Stopped                 sleep 100
```

Let's resume job 2 in the background

```
/home/cis90ol/simmsben $ bg 1
[1]- sleep 120 &
/home/cis90ol/simmsben $ jobs
[1]   Running                 sleep 120 &
[2]-  Running                 sleep 110 &
[3]+  Stopped                 sleep 100
```

Let's resume job 1in the background

```
/home/cis90ol/simmsben $ fg 3
sleep 100
```

Let's resume job 1 in the foreground

At this point we lose control of the keyboard again until sleep 100 is finished

Job Control

Managing jobs

```
/home/cis90ol/simmsben $ jobs
[1]-  Done
sleep 120
[2]+  Done
sleep 110
```

Background jobs are all done!

Load Balancing & Scheduling (Review)

Load Balancing

The **at** command:

- reads from stdin for a list of commands to run
- runs those commands at the specified time
- Any output from those commands will be emailed
- Use **atq** and **atrm** to manage scheduled commands

*Use **at** to schedule commands to run in the future*

Load Balancing

Managing queued jobs

```
at now + 5 minutes

at now + 1 hour

at 7:58AM

at 7:47PM 11/25/2016

at teatime
```

Ways to specify future times

Load Balancing

Managing queued jobs

```
/home/cis90/simben $ atq
25      2011-11-12 14:09 a simben90
28      2011-12-12 03:00 a simben90
27      2011-11-19 12:10 a simben90
26      2011-11-12 16:00 a simben90
24      2011-11-12 12:14 a simben90
```

*The **atq** command lists jobs queued to run in the future*

```
/home/cis90/simben $ atrm 24
/home/cis90/simben $ atq
25      2011-11-12 14:09 a simben90
28      2011-12-12 03:00 a simben90
27      2011-11-19 12:10 a simben90
26      2011-11-12 16:00 a simben90
```

*The **atrm** command is used to remove jobs from the queue*

```
/home/cis90/simben $ jobs
```

*Note: The **jobs** command lists processes running or suspended in the background and is NOT used for **at** commands.*

Load Balancing

Try it yourself with your own terminal device and username:

```
[rsimms@oslab ~]$ tty
/dev/pts/x

[rsimms@oslab ~]$ at now + 2 minutes
at> echo "Take Benji for a walk" | mail -s "walk the dog" $LOGNAME
at> echo "Read your mail" > /dev/pts/x
at> <EOT>
job 11 at 2012-11-05 11:02
[rsimms@oslab ~]$ atq
11      2012-11-05 11:02 a rsimms
[rsimms@oslab ~]$
```

These should match

Type what happens in the chat window:

text editors

There are lots of text editors …

Windows
- notepad
- notepad++
- textpad

Mac
- TextWrangler

Linux
- gedit
- emacs
- nano
- vi
- jove

Thanks Maria!

Text editors and word processors are different!

- *Word processors are used by many different people to create documents containing text and graphics.*
- *Text editors are used by programmers to develop software and web designers to create web sites.*

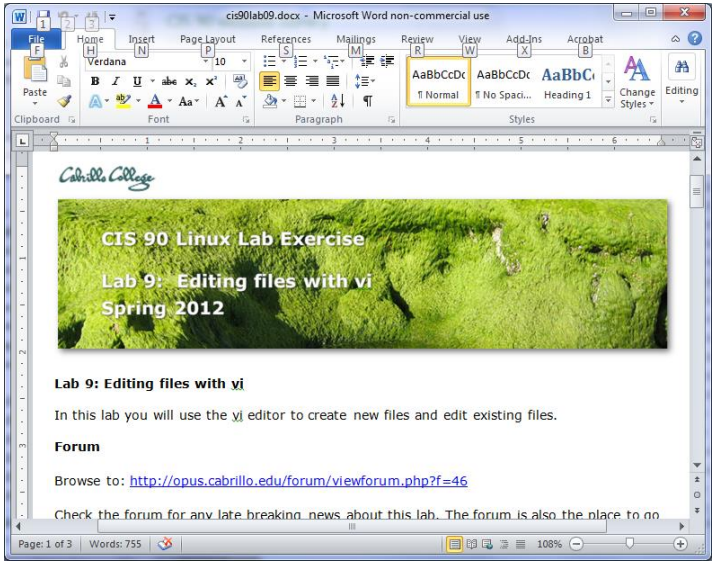

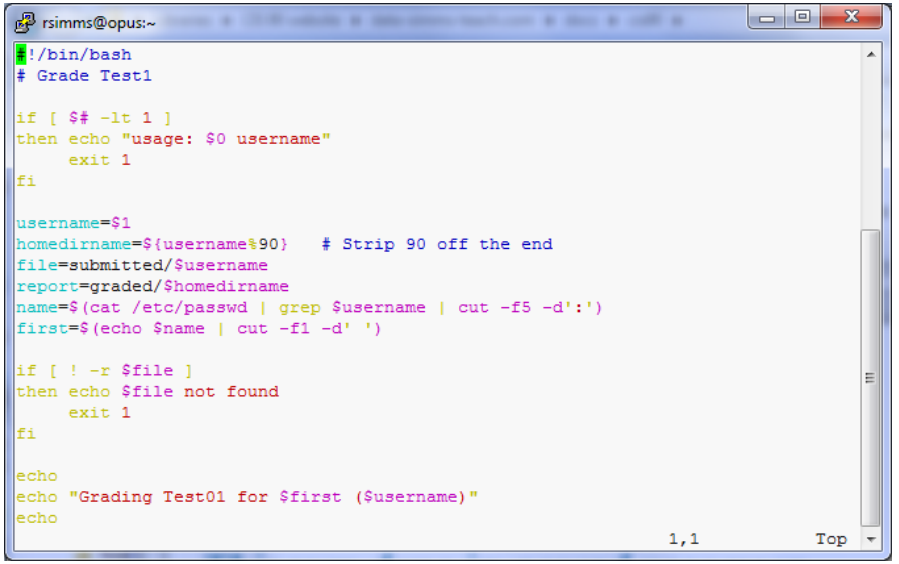

Word processors *allow a rich set of formatting (fonts, sizes, styles, color) and graphics to be added to documents.*

Text editors *use color to show the language syntax*

vi 101

On Opus we are actually running VIM

```
/home/cis90/simben $ type -a vi
vi is aliased to `vim'
vi is /bin/vi
/home/cis90/simben $ type vim
vim is hashed (/usr/bin/vim)
```

History:

- The original vi code was written by Bill Joy for BSD Unix
- Bill Joy co-founded Sun Microsystems in 1982
- vi (for "visual")
- vim is an enhanced version of vi

```
/home/cis90/simben $
/home/cis90/simben $ vi dogbone
```

Type this

See this …

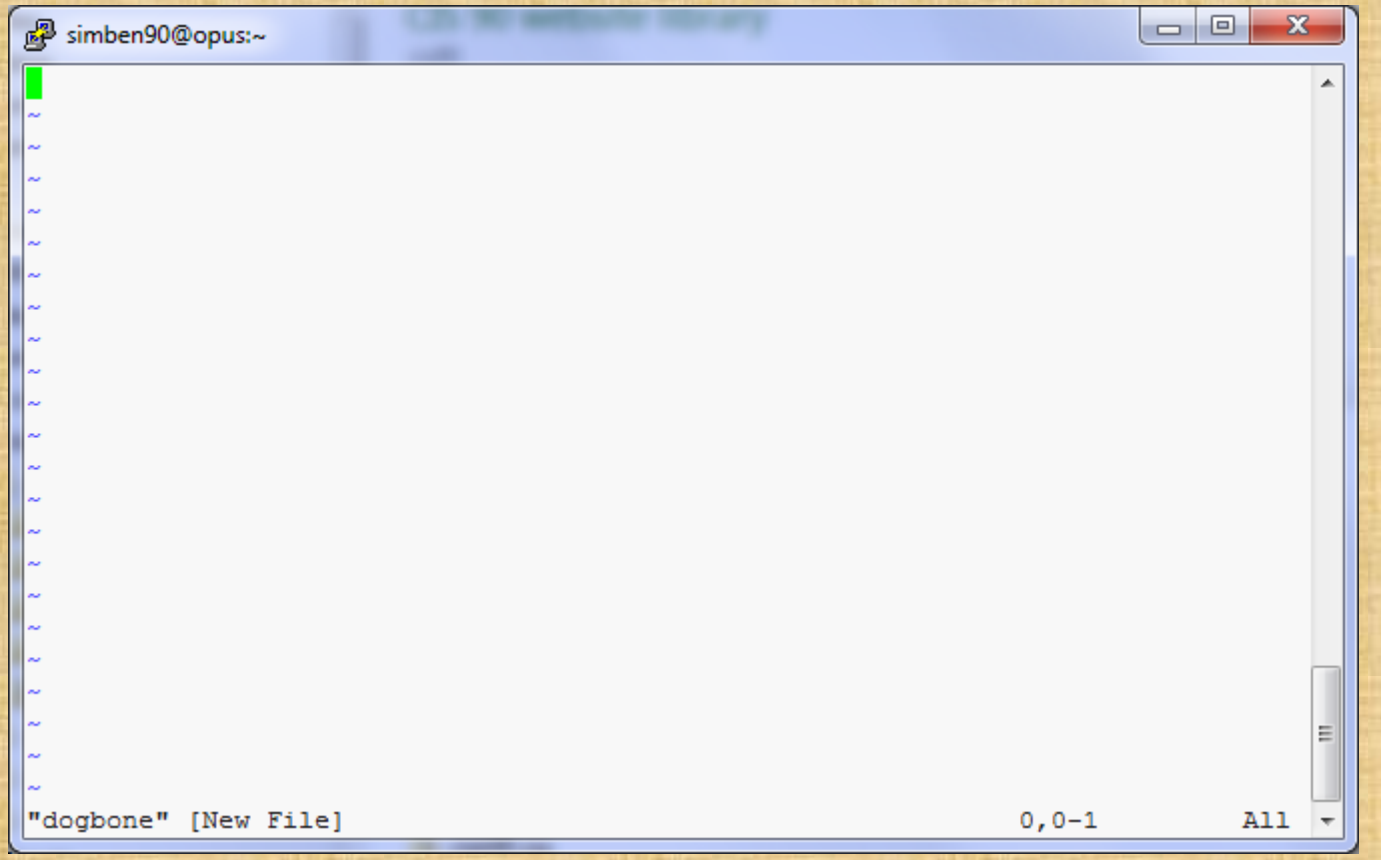

Take your hands OFF THE MOUSE – don't use it in vi!

*Tap the letter **i** key (for insert)*

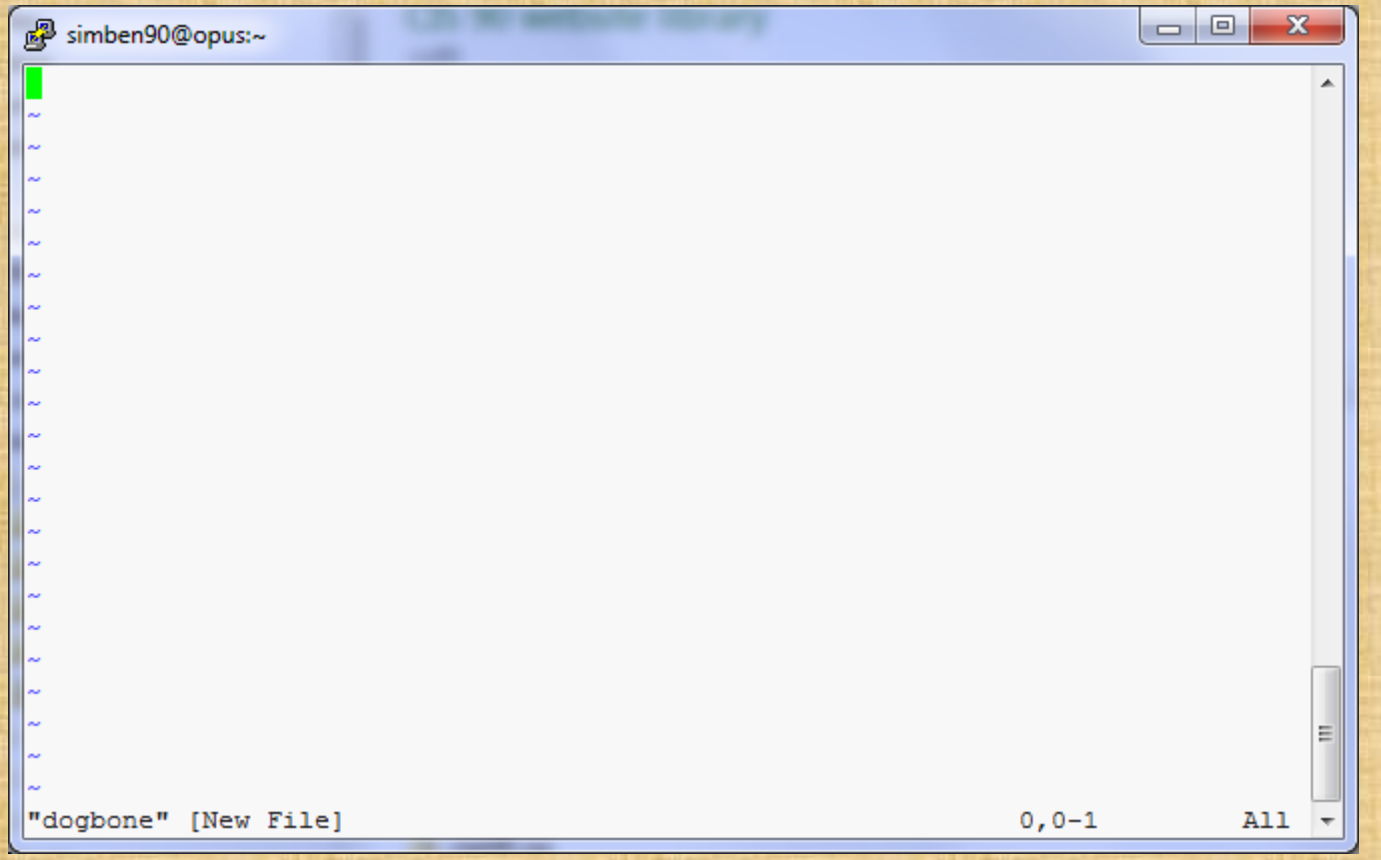

Keep your hands OFF THE MOUSE – don't use it in vi!

See this …

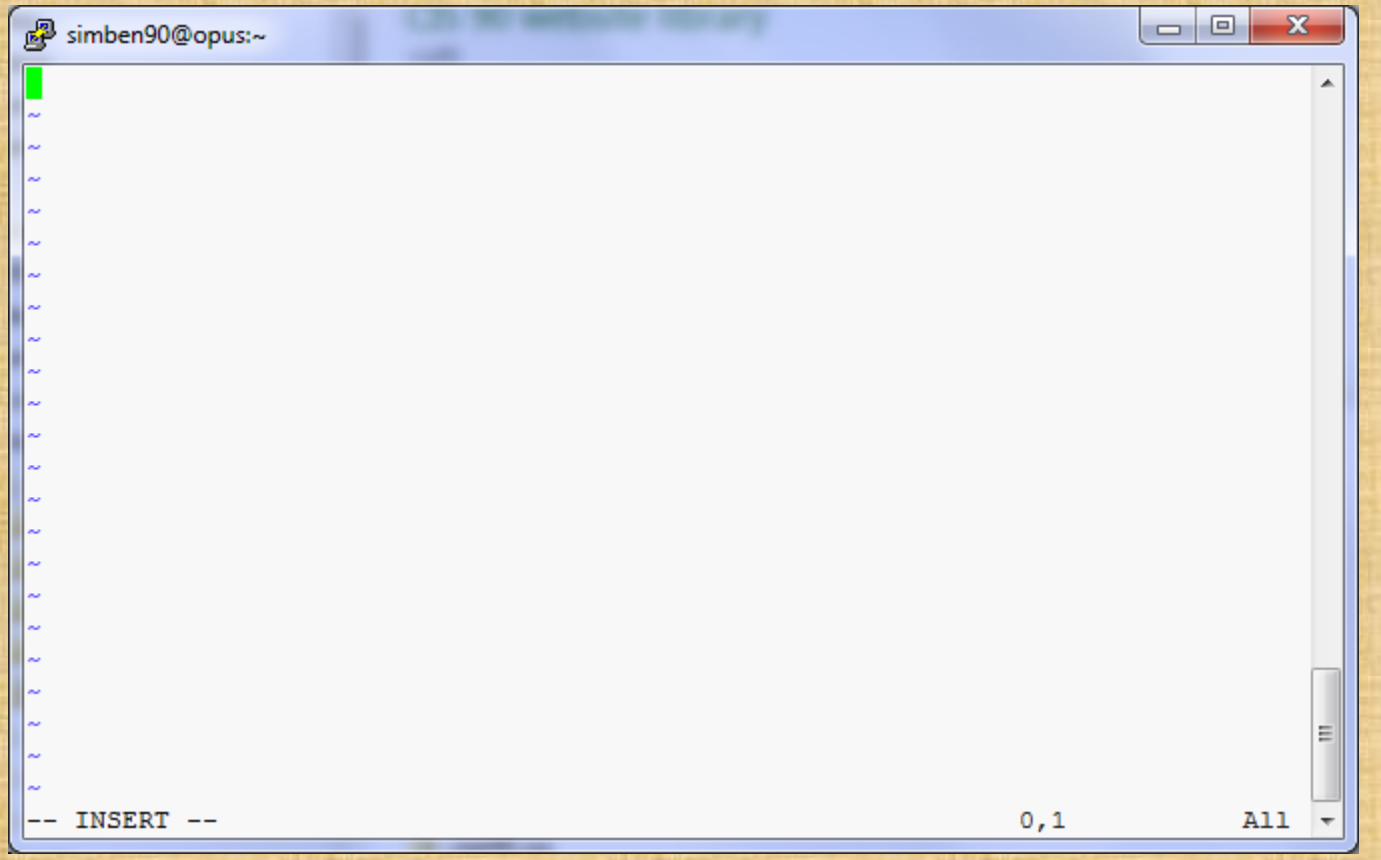

Keep your hands OFF THE MOUSE – don't use it in vi!

Very carefully type these five lines

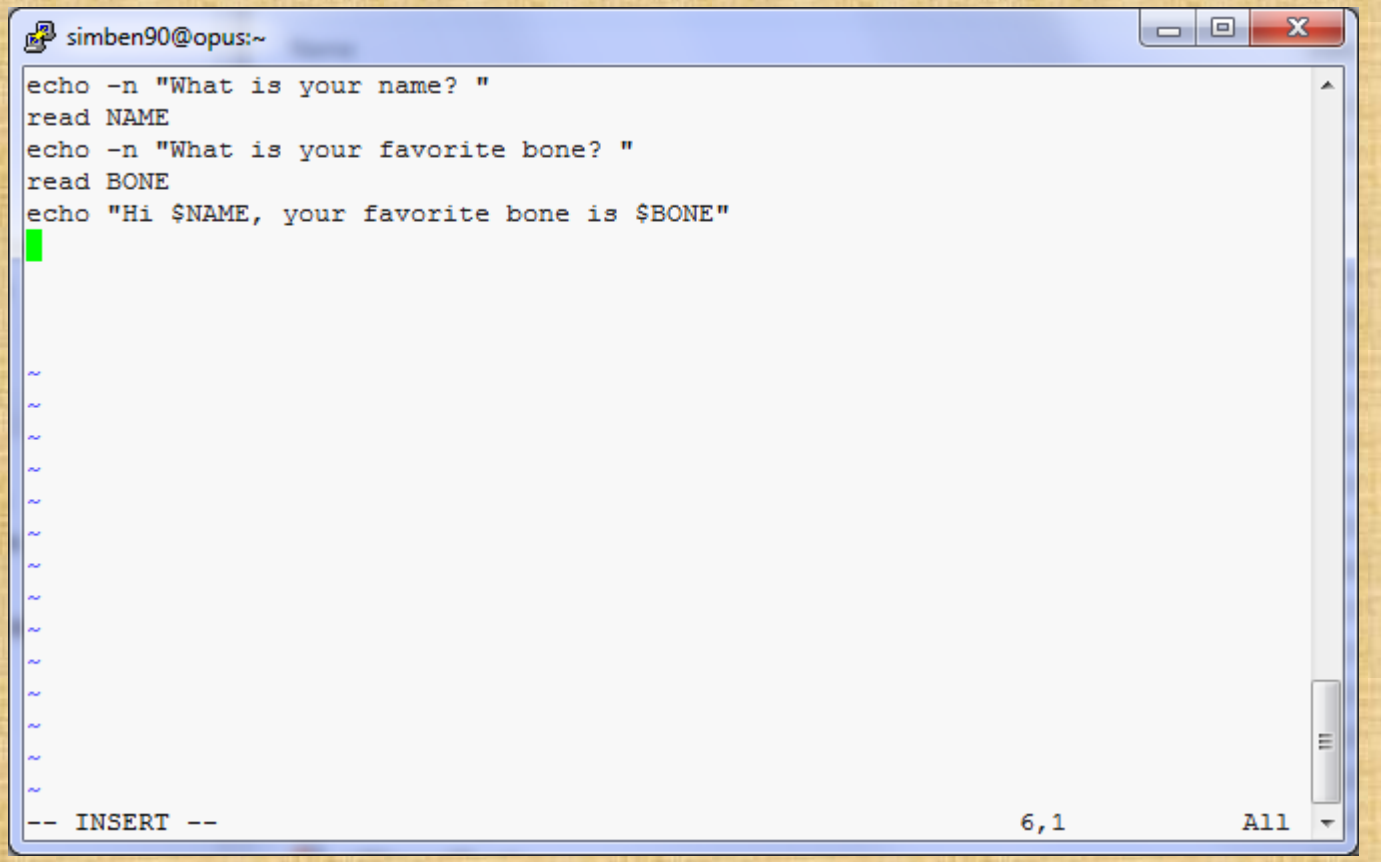

Keep your hands OFF THE MOUSE – don't use it in vi!

Have your neighbor check that your five lines are PERFECT

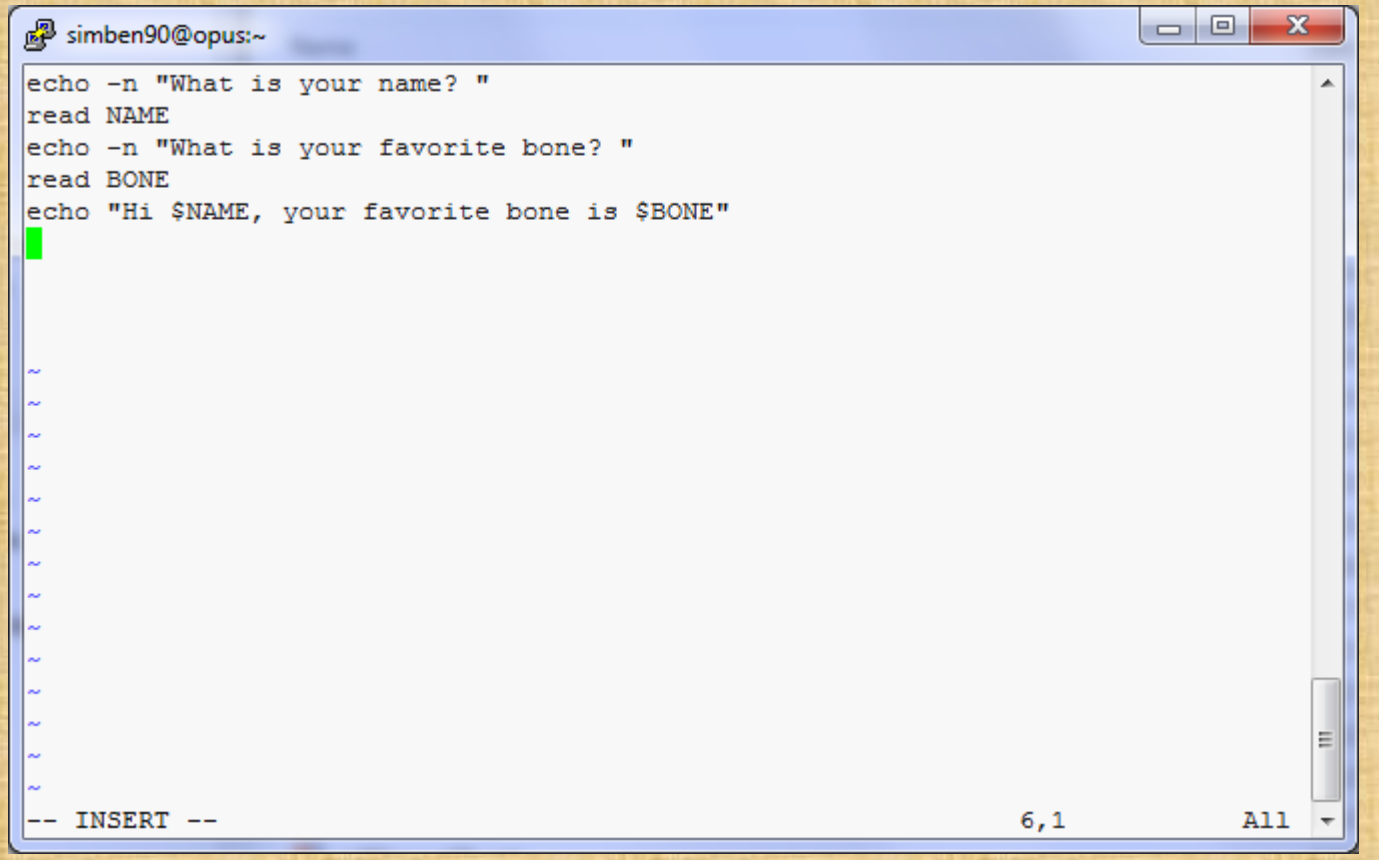

Keep your hands OFF THE MOUSE – don't use it in vi!

*Tap the **esc** key*

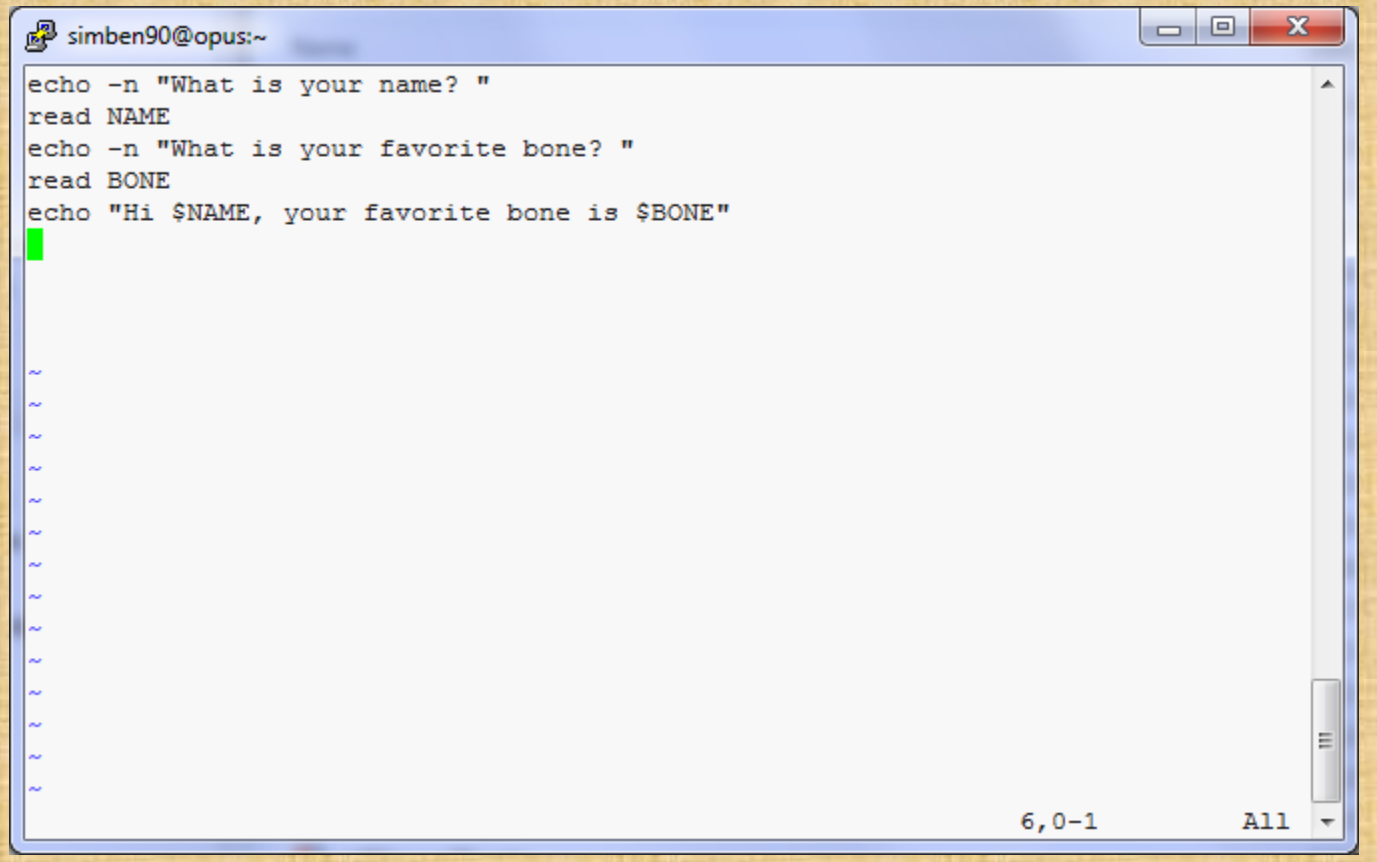

Keep your hands OFF THE MOUSE – don't use it in vi!

Type a **:**

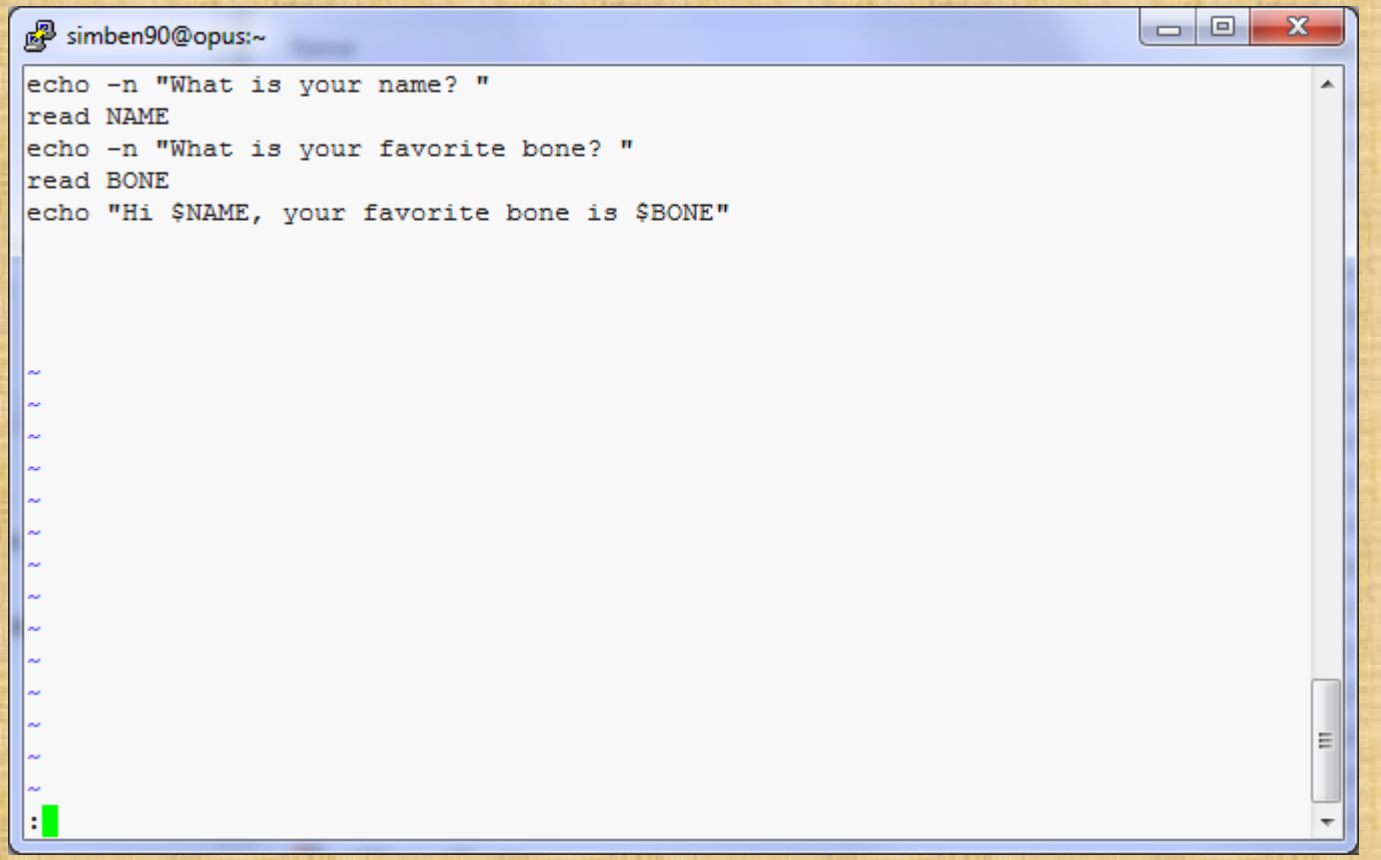

Keep your hands OFF THE MOUSE – don't use it in vi!

*Type **wq***

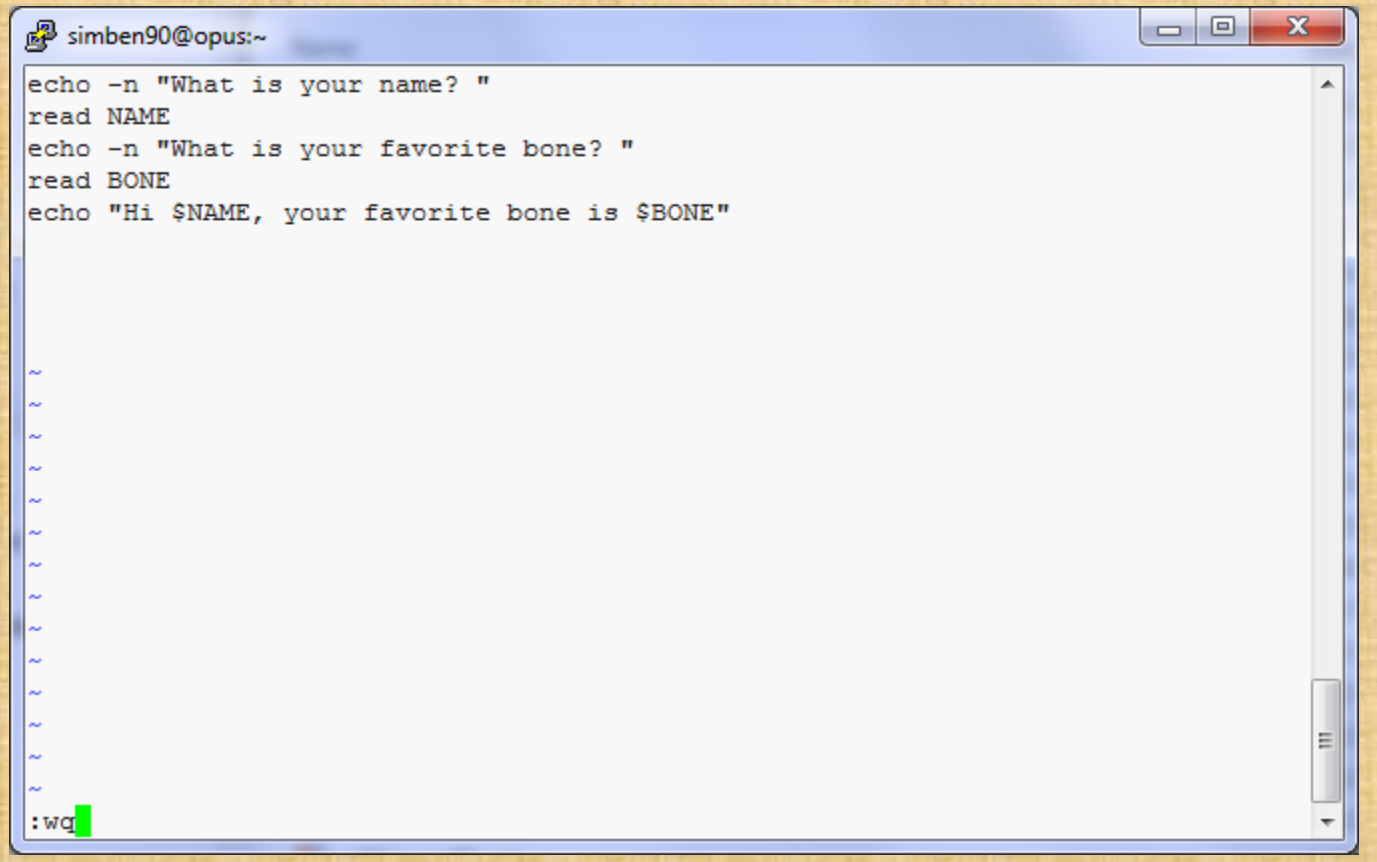

Keep your hands OFF THE MOUSE – don't use it in vi!

Tap the enter key

```
/home/cis90/simben $ vi dogbone
/home/cis90/simben $
```

Add execute permissions and try your new script

```
/home/cis90/simben $ chmod +x dogbone

/home/cis90/simben $ dogbone
What is your name? Benji
What is your favorite bone? chicken
Hi Benji, your favorite bone is chicken
/home/cis90/simben $
```

vi

COMMAND mode
INSERT mode
command LINE mode

```
/home/cis90/simben $ cp letter myletter
/home/cis90/simben $ vi myletter
```

COMMAND mode

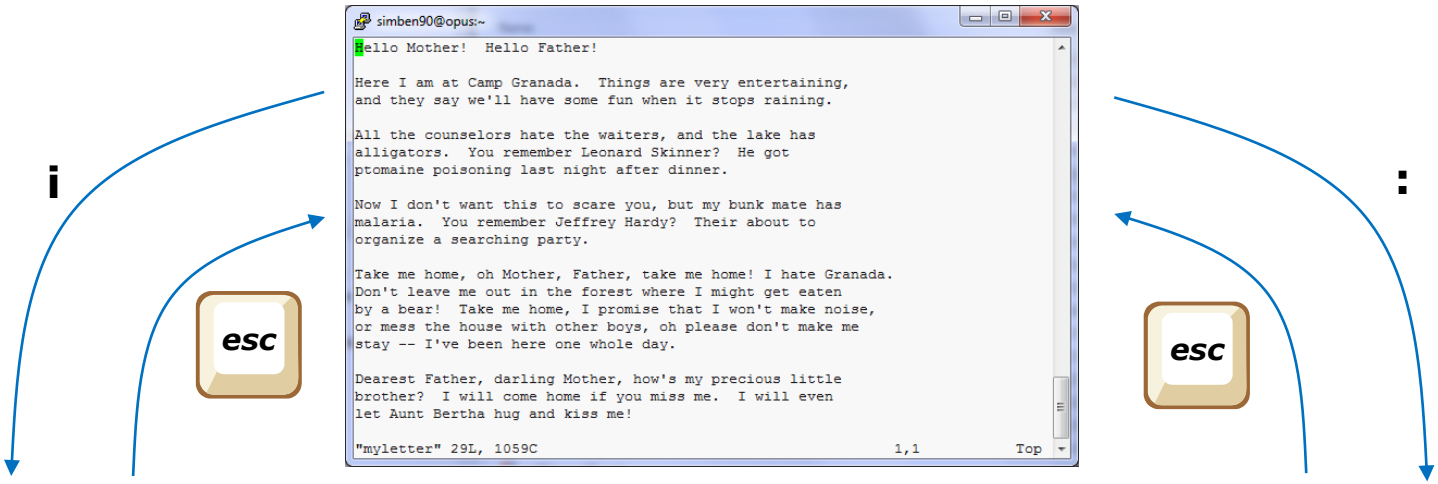

INSERT mode

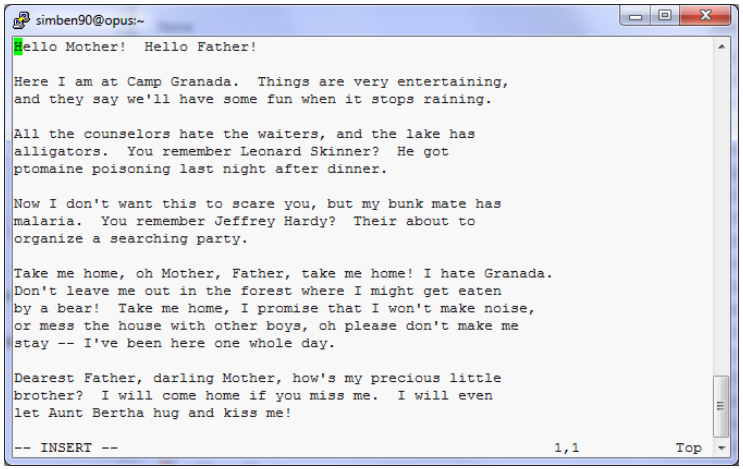

Command LINE mode

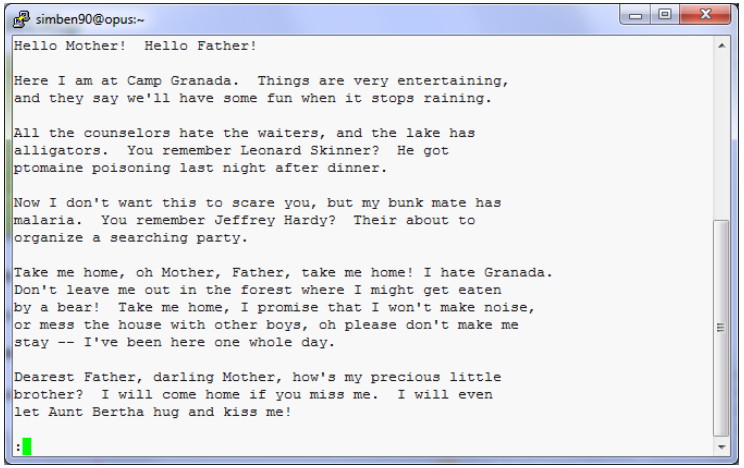

vi

Moving around in a file

Use in COMMAND mode

h moves the cursor one character to the left
j moves the cursor down one line
k moves the cursor up one line
l moves the cursor one character to the right

^d scrolls down 10 lines
^u scrolls up 10 lines
^f page forward one page
^b page back one page

Try typing a number in front of these commands and notice what happens

With vim (not vi) you can use arrow and page keys instead of these letter commands

vi

Moving around in a file

Use in COMMAND mode

w moves the cursor one "word" forward
b moves the cursor one "word" back

Try typing a number in front of these commands and notice what happens

0 (zero) moves the cursor to the beginning of the line
$ moves the cursor to the end of the line

G moves the cursor to the last line in the file
1G moves the cursor to the first line in the file
105G moves the cursor to line 105

vi
Saving and Quitting

Use in command LINE mode

:w writes any changes to the file you are editing (like Save)

:q quits vi if you have saved your changes
:q! quits vi even if you haven't saved changes

:wq writes and quits
:wq! writes and quits vi even if you haven't saved changes

vi

Reading in and Writing out files

Use in command LINE mode

:w *filename* saves your file to a new name (like Save As)
:w! *filename* saves your file to a new name overwriting any previous data

:r *filename* reads in the contents of *filename* starting from the cursor position

:e *filename* replaces the current content with the content from *filename*

:%s /*string1*/*string2*/g replaces all string1 with string2 in the file

vi
Entering INSERT mode

From COMMAND mode.

i Ready to insert characters immediately before the current cursor position
I Ready to insert characters at the start of the current line

a Ready to append characters immediately after the current cursor position
A Ready to append characters at the end of the current line

o Ready to input characters in a new line that opens up below the cursor
O Ready to input characters in a new line that opens up above the cursor

vi
Cut, Copy, Pasting Commands

Use in COMMAND mode

x Deletes the current character
r Replace the current character with the character you type next

dw Deletes the current word
dd Deletes the current line

D Deletes to the end of the line

yy Copies a line to the clipboard buffer
p Pastes whatever is in the clipboard buffer below the current cursor
P Pastes whatever is in the clipboard buffer above the current cursor

vi
Miscellaneous Useful Commands

Use in COMMAND mode.

^g Tells you the filename you are editing and what line your cursor is on

u Undoes the last command you executed
^r Undo the undo (redo)

. Repeats the last command you executed

/string Searches for the string of characters in the file
n Finds the next occurrence of the current search string looking down the file
N Finds the next occurrence of the current search string looking up the file

~ Changes the case of the current character

Use vi to edit your *edits/text.err* file

```
This is line number1.
This is line number 1.
Thi sis line line number 2.
his is line number3.line number3.
This is This is line #4.
this number5 is line .
Here is line number     6.
This is lamw number     7.
Thi is line nunber9.
This is line
number10.
```

```
This is line number 1.
This is line number 2.
This is line number 3.
This is line number 4.
This is line number 5.
This is line number 6.
This is line number 7.
This is line number 8.
This is line number 9.
This is line number 10.
```

Copy your corrected file into the chat window when finished

http://vim.wikia.com/wiki/Main_Page

Tips and tricks for VIM users

The Mug of vi

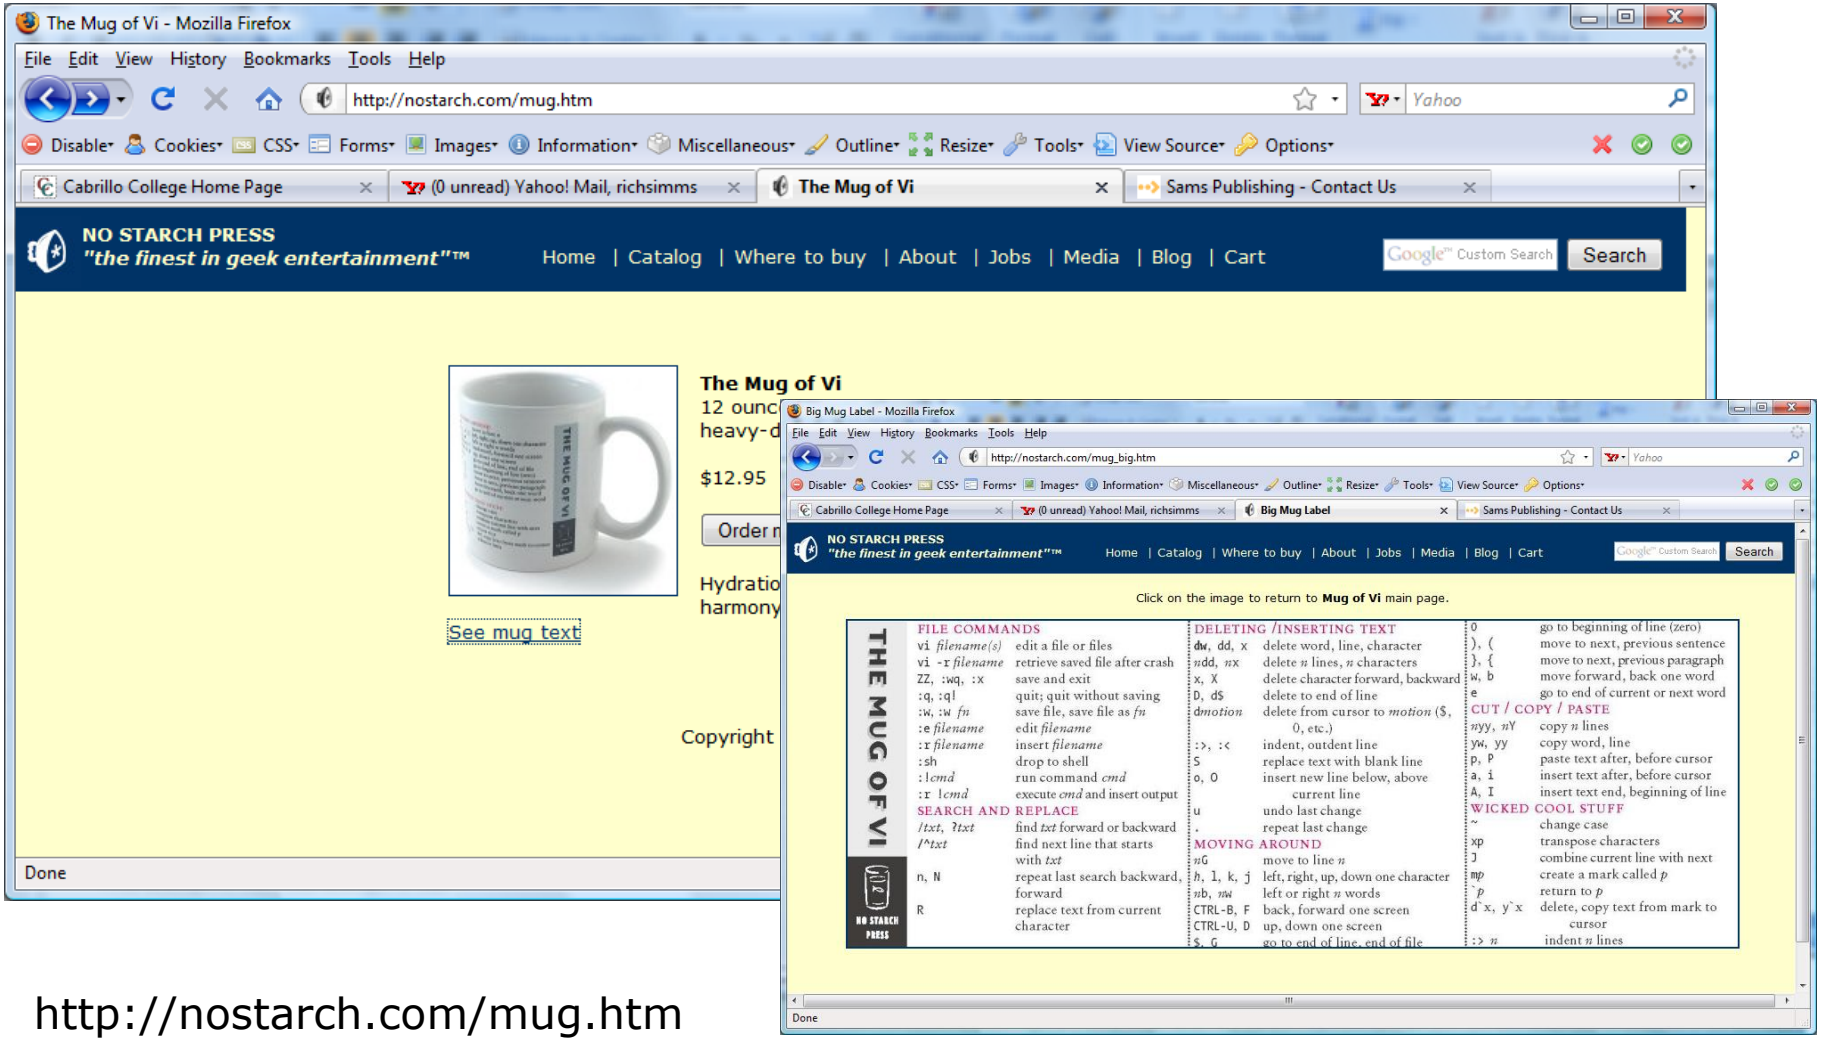

http://nostarch.com/mug.htm

/bin/mail and vi

```
/home/cis90/simben $ mail milhom90
Subject: Good Bones
Hey Homer,
I really appreciate thatbone you sent me last week.
Let me knwo if you want to go mark some fench posts
this weekend.
Later,
Ben
```

You are composing a message and you spot some typos …
CRUD … what can you do?

/bin/mail and vi

```
/home/cis90/simben $ mail milhom90
Subject: Good Bones
Hey Homer,
I really appreciate thatbone you sent me last week.
Let me knwo if you want to go mark some fench posts
this weekend.
Later,
Ben
~v
```

Well … you could try the ~v command

/bin/mail and vi

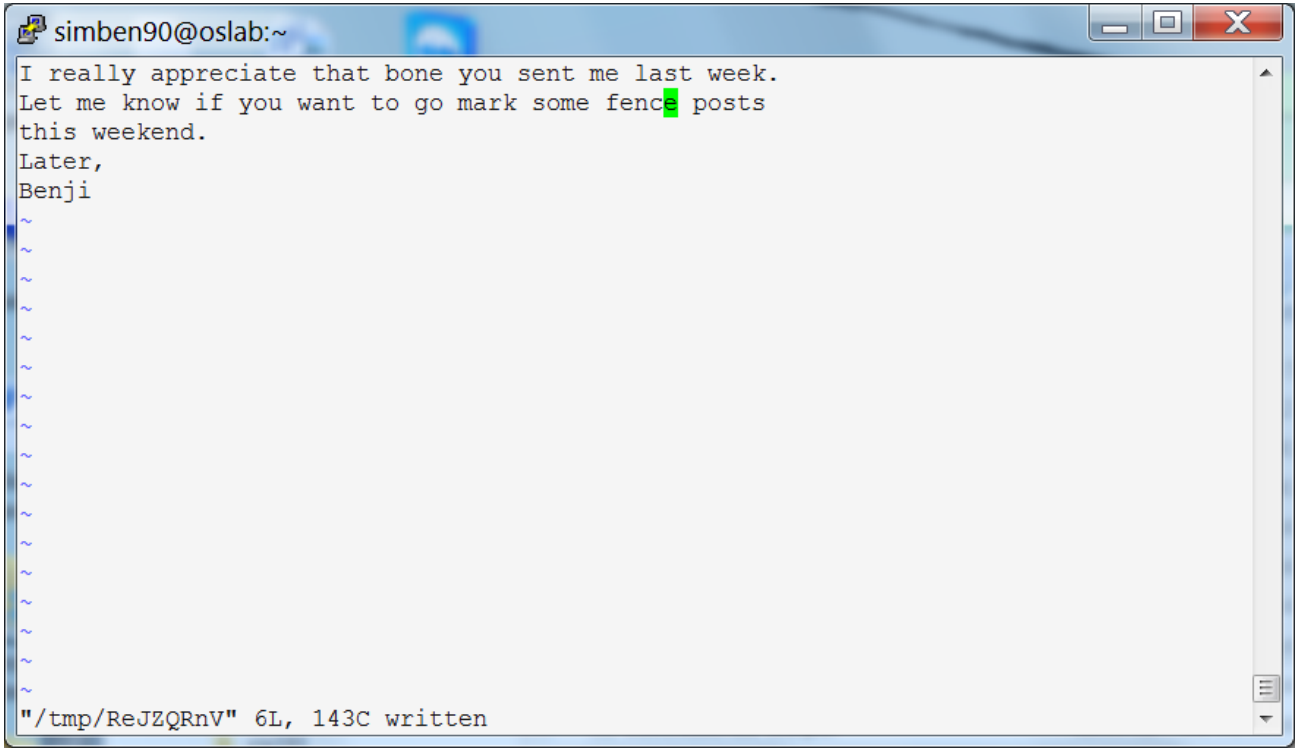

The message is loaded into vi where changes or additions can be made. :wq is used to save and quit vi

/bin/mail and vi

```
/home/cis90/simben $ mail milhom90
Subject: Good Bones
Hey Homer,
I really appreciate thatbone you sent me last week.
Let me knwo if you want to go mark some fench posts
this weekend.
Later,
Ben
~v
(continue)
.
EOT
/home/cis90/simben $
```

The earlier text with typos is still showing, however the corrected version is what is actually sent.

/bin/mail and vi

```
/home/cis90/milhom $ mail
Heirloom Mail version 12.4 7/29/08.  Type ? for help.
"/var/spool/mail/milhom90": 157 messages 5 new 155 unread
>N157 Benji Simms           Mon Nov 10 14:05  25/952   "Good Bones"
& 157
Message 157:
From simben90@oslab.cis.cabrillo.edu  Mon Nov 10 14:05:20 2014
Return-Path: <simben90@oslab.cis.cabrillo.edu>
From: Benji Simms <simben90@oslab.cis.cabrillo.edu>
Date: Mon, 10 Nov 2014 14:05:20 -0800
To: milhom90@oslab.cis.cabrillo.edu
Subject: Good Bones
User-Agent: Heirloom mailx 12.4 7/29/08
Content-Type: text/plain; charset=us-ascii
Status: R

Hey Homer,
I really appreciate that bone you sent me last week.
Let me know if you want to go mark some fence posts
this weekend.
Later,
Benji

&
```

The message Homer reads has all the typos fixed.

Fix an email message before sending

```
/home/cis90/simben/edits $ mail rsimms
Subject: test of vi
sdkfjas;dflkjas;lkdfj
~v
(continue)
.
EOT
/home/cis90/simben/edits $
```

In vi:
- Use i to enter insert mode
- make changes
- save with <Esc>:wq

A Tangent on Spell

spell command

```
/home/cis90/roddyduk/edits $ cat text
Welcome to the CIS 90 class !!

/home/cis90/roddyduk/edits $ spell text
CIS
```

spell *command flags CIS as misspelled word.*

How can we add CIS to the dictionary?

spell command

```
/home/cis90/roddyduk/edits $ cat text
Welcome to the CIS 90 class !!
/home/cis90/roddyduk/edits $ spell text
CIS
```

How can we add CIS to the dictionary?

```
/home/cis90/roddyduk/edits $ man spell
No manual entry for spell
/home/cis90/roddyduk/edits $ type spell
spell is hashed (/usr/bin/spell)
/home/cis90/roddyduk/edits $ file /usr/bin/spell
/usr/bin/spell: Bourne shell script text executable
/home/cis90/roddyduk/edits $ cat /usr/bin/spell
#!/bin/sh

# aspell list mimicks the standard unix spell program, roughly.

cat "$@" | aspell list --mode=none | sort -u

/home/cis90/roddyduk/edits $
```

Hmmm. No man page for spell ???????????

*OK, the actual command is **aspell***

spell command

```
ASPELL(1)                Aspell Abbreviated User's Manual                ASPELL(1)

NAME
       aspell - interactive spell checker

SYNOPSIS
       aspell [options] <command>

DESCRIPTION
       aspell  is  a utility that can function as an ispell -a replacement,
       as an independent spell checker, as  a  test  utility  to  test  out
       Aspell features, and as a utility for managing dictionaries.

COMMANDS
       <command> is one of:

       -?,help
              display the help message

       -c,check file
              to spell-check a file
```

There must be a way to add CIS …. but … lets try google

spell command

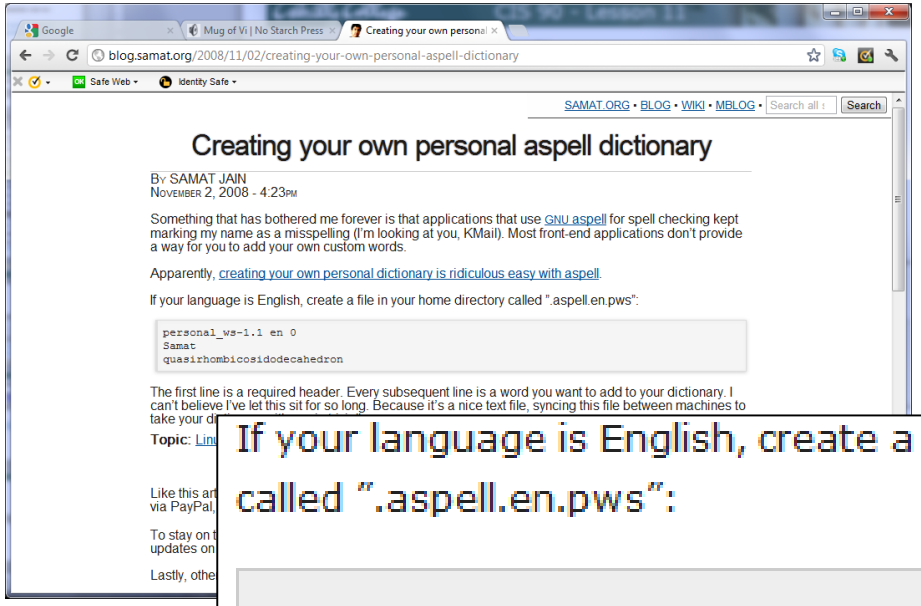

How to add words to your dictionary

If your language is English, create a file in your home directory called ".aspell.en.pws":

```
personal_ws-1.1 en 0
Samat
quasirhombicosidodecahedron
```

Googling "linux aspell personal dictionary" yields this page

Bingo! Thank you Samat Jain

spell command

```
/home/cis90/roddyduk/edits $ cd
/home/cis90/roddyduk $ echo "personal_ws-1.1 en 0" >  .aspell.en.pws
/home/cis90/roddyduk $ echo "CIS" >> .aspell.en.pws
/home/cis90/roddyduk $ cd edits/
/home/cis90/roddyduk/edits $ spell text
```

This is how you would add your own custom dictionary to be used with spell checks

```
/home/cis90/simben $ cat edits/spellk
Spell Check


Eye halve a spelling chequer
It came with my pea sea
It plainly marques four my revue
Miss steaks eye kin knot sea.
Eye strike a key and type a word
And weight four it two say
Weather eye am wrong oar write
It shows me strait a weigh.
As soon as a mist ache is maid
It nose bee fore two long
And eye can put the error rite
Its rare lea ever wrong.
Eye have run this poem threw it
I am shore your pleased two no
Its letter perfect awl the weigh
My chequer tolled me sew.

/home/cis90/simben $ spell edits/spellk
chequer
```

How would you add "chequer" (the British spelling) to your personal dictionary?

Copy the commands used into the chat window when finished

```
$ echo "personal_ws-1.1 en 0" > ~/.aspell.en.pws
$ echo "chequer" >> ~/.aspell.en.pws
```


Assignment

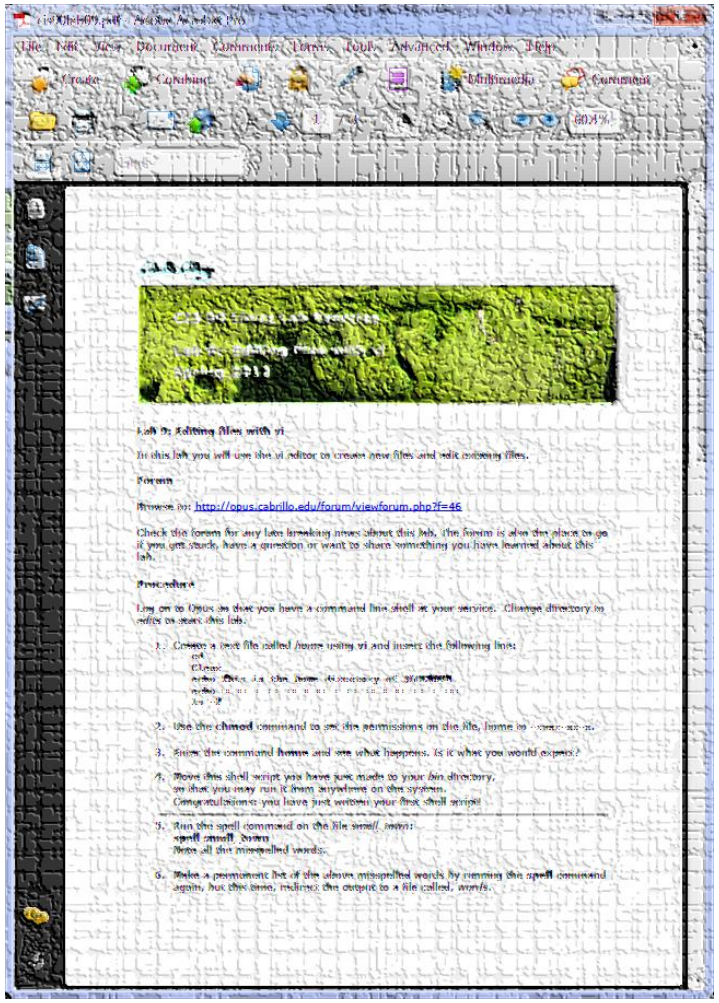

Lab 9 will help you start building your vi skills!

Instructor: remember to mail students the tech file!

~/cis90/lab09/mail-tech-all

or

at *<end-of-class>*
at> **/home/rsimms/cis90/lab09/mail-tech-all**
at> **<Ctrl-d>**


Wrap up

New commands:

vi	Run vi editor

New Files and Directories:

na	na

Next Class

Assignment: Check Calendar Page on web site to see what is due next week.

Lab 9 Five Posts

Quiz questions for next class:

- How do you send a SIGKILL to one of your own processes?
- What vi command is used to exit vi without saving any of the changes you made?
- What vi commands are used for copy and paste?

Backup

The **mystery** of Ctrl-Z vs Ctrl-F

Signals
Special keystrokes

```
/home/cis90/roddyduk $ stty -a
speed 38400 baud; rows 26; columns 78; line = 0;
intr = ^C; quit = ^\; erase = ^?; kill = ^U; eof = ^D; eol = <undef>;
eol2 = <undef>; swtch = <undef>; start = ^Q; stop = ^S; susp = ^F; rprnt = ^R;
werase = ^W; lnext = ^V; flush = ^O; min = 1; time = 0;
```

```
[rsimms@opus ~]$ stty -a
speed 38400 baud; rows 39; columns 84; line = 0;
intr = ^C; quit = ^\; erase = ^?; kill = ^U; eof = ^D; eol = <undef>; eol2 = <undef>;
swtch = <undef>; start = ^Q; stop = ^S; susp = ^Z; rprnt = ^R; werase = ^W;
lnext = ^V; flush = ^O; min = 1; time = 0;
```

Why does the keystroke to send a Suspend (SIGTSTP or 20) signal differ between roddyduk (^F or Ctrl-F) and rsimms (^Z or Ctrl-Z)?

Job Control
A feature of the bash shell

Ctrl-Z or Ctrl-F (sends SIGTSTP 20 signal)
- Stops (suspends) a foreground process

```
[rsimms@opus ~]$ sleep 5

[1]+  Stopped                 sleep 5
```

Ctrl-Z is tapped which stops the sleep command

PID 7728 is stopped

```
[rsimms@opus ~]$ ps -l  -u rsimms
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
5 S   201  5368  5365  0  75   0 -  2460 -      ?        00:00:00 sshd
0 S   201  5369  5368  0  76   0 -  1165 wait   pts/0    00:00:00 bash
5 S   201  6203  6200  0  75   0 -  2491 -      ?        00:00:00 sshd
0 S   201  6204  6203  0  75   0 -  1165 -      pts/6    00:00:00 bash
0 T   201  7728  6204  0  75   0 -   926 finish pts/6    00:00:00 sleep
0 R   201  7730  5369  0  78   0 -  1062 -      pts/0    00:00:00 ps
[rsimms@opus ~]$
```

Job Control

A feature of the bash shell

bg command

- Resumes a suspended job in the background

```
[rsimms@opus ~]$ sleep 5

[1]+  Stopped                 sleep 5
[rsimms@opus ~]$ bg
[1]+ sleep 5 &
[rsimms@opus ~]$
```

bg resumes the sleep command

PID 7728 is gone

```
[rsimms@opus ~]$ ps -l  -u rsimms
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
5 S   201  5368  5365  0  75   0 -  2460 -      ?        00:00:00 sshd
0 S   201  5369  5368  0  76   0 -  1165 wait   pts/0    00:00:00 bash
5 S   201  6203  6200  0  75   0 -  2491 -      ?        00:00:00 sshd
0 S   201  6204  6203  0  75   0 -  1165 -      pts/6    00:00:00 bash
0 R   201  7742  5369  0  78   0 -  1061 -      pts/0    00:00:00 ps
[rsimms@opus ~]$
```

Signals
Jim's app script

rsimms@opus:/home/cis90/depot

```
#!/bin/sh
#
# app - script to demostrate use of signals
#
# Usage:  run app with no options or parameters
#
# Send signals to it with keystrokes or kill command
#
# Notes:
# stty -echo stop the display of characters typed
# stty echo makes typed characters visible again
# stty susp ^Z sets suspend keystroke to Ctlr-Z (to stop forground processes)
# stty susp @ sets suspend character to @ (to stop foreground processes)
#
trap '' 2  #Ignore SIGINT
trap 'echo -n quit it!' 3 #Handle SIGQUIT
trap 'stty echo susp ^Z;echo ee; echo cleanup;exit' 15 #Handle SIGTERM
clear
banner testing
stty -echo susp @
sleep 1
echo  one
sleep 1
echo two
sleep 1
echo -n thr
while :
do sleep 1
done
~
                                                              13,1          All
```

This is why Ctrl-F (suspend) stopped working and we had to use Ctrl-Z

Tangent on bg and SIGCONT

Signals

What is signal 18?

Running process gets a signal

Signals

SIGSTKFLT	16	Stack fault
SIGCHLD	17	Child process has stopped or exited, changed (POSIX)
SIGCONT	18	Continue executing, if stopped (POSIX)
SIGSTOP	19	Stop executing(can't be caught or ignored) (POSIX)
SIGTSTP	20	Terminal stop signal (POSIX) ***Ctrl-Z or Ctrl-F***
SIGTTIN	21	Background process trying to read, from TTY (POSIX)
SIGTTOU	22	Background process trying to write, to TTY (POSIX)
SIGURG	23	Urgent condition on socket (4.2 BSD)
SIGXCPU	24	CPU limit exceeded (4.2 BSD)
SIGXFSZ	25	File size limit exceeded (4.2 BSD)
SIGVTALRM	26	Virtual alarm clock (4.2 BSD)
SIGPROF	27	Profiling alarm clock (4.2 BSD)
SIGWINCH	28	Window size change (4.3 BSD, Sun)
SIGIO	29	I/O now possible (4.2 BSD)
SIGPWR	30	Power failure restart (System V)

Signal 18 continues a stopped process ... isn't that what bg does?

The bg command is used to resume a stopped process

```
/home/cis90/roddyduk $ sleep 60
Ctrl-F (or Ctrl-Z) typed here
[1]+  Stopped                 sleep 60
/home/cis90/roddyduk $ bg
[1]+ sleep 60 &
/home/cis90/roddyduk $ jobs
[1]+  Running                 sleep 60 &
/home/cis90/roddyduk $ jobs
[1]+  Running                 sleep 60 &
/home/cis90/roddyduk $ jobs
[1]+  Done                    sleep 60
/home/cis90/roddyduk $
```

bg resumed the stopped process which runs till it is finished

*Instead of using **bg** to resume a stopped process in the background, lets try a SIGCONT (signal 18) instead*

```
/home/cis90/roddyduk $ sleep 60
Ctrl-F (or Ctrl-Z) typed here
[1]+  Stopped                 sleep 60
/home/cis90/roddyduk $ ps -l
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
0 S  1000 10705 10704  0  76   0 -  1165 wait   pts/0    00:00:00 bash
0 T  1000 10743 10705  0  75   0 -   926 finish pts/0    00:00:00 sleep
0 R  1000 10744 10705  0  78   0 -  1051 -      pts/0    00:00:00 ps
/home/cis90/roddyduk $ jobs
[1]+  Stopped                 sleep 60
/home/cis90/roddyduk $ kill -18 10743
/home/cis90/roddyduk $ jobs
[1]+  Running                 sleep 60 &
/home/cis90/roddyduk $ ps -l
F S   UID   PID  PPID  C PRI  NI ADDR SZ WCHAN  TTY          TIME CMD
0 S  1000 10705 10704  0  75   0 -  1165 wait   pts/0    00:00:00 bash
0 S  1000 10743 10705  0  85   0 -   926 322800 pts/0    00:00:00 sleep
0 R  1000 10746 10705  0  77   0 -  1050 -      pts/0    00:00:00 ps
/home/cis90/roddyduk $ jobs
[1]+  Running                 sleep 60 &
/home/cis90/roddyduk $ jobs
[1]+  Running                 sleep 60 &
/home/cis90/roddyduk $ jobs
[1]+  Done                    sleep 60
```

Note sending a 18 signal or using the bg command will resume a stopped process